


1. Exploded View & Part List

Exploded View

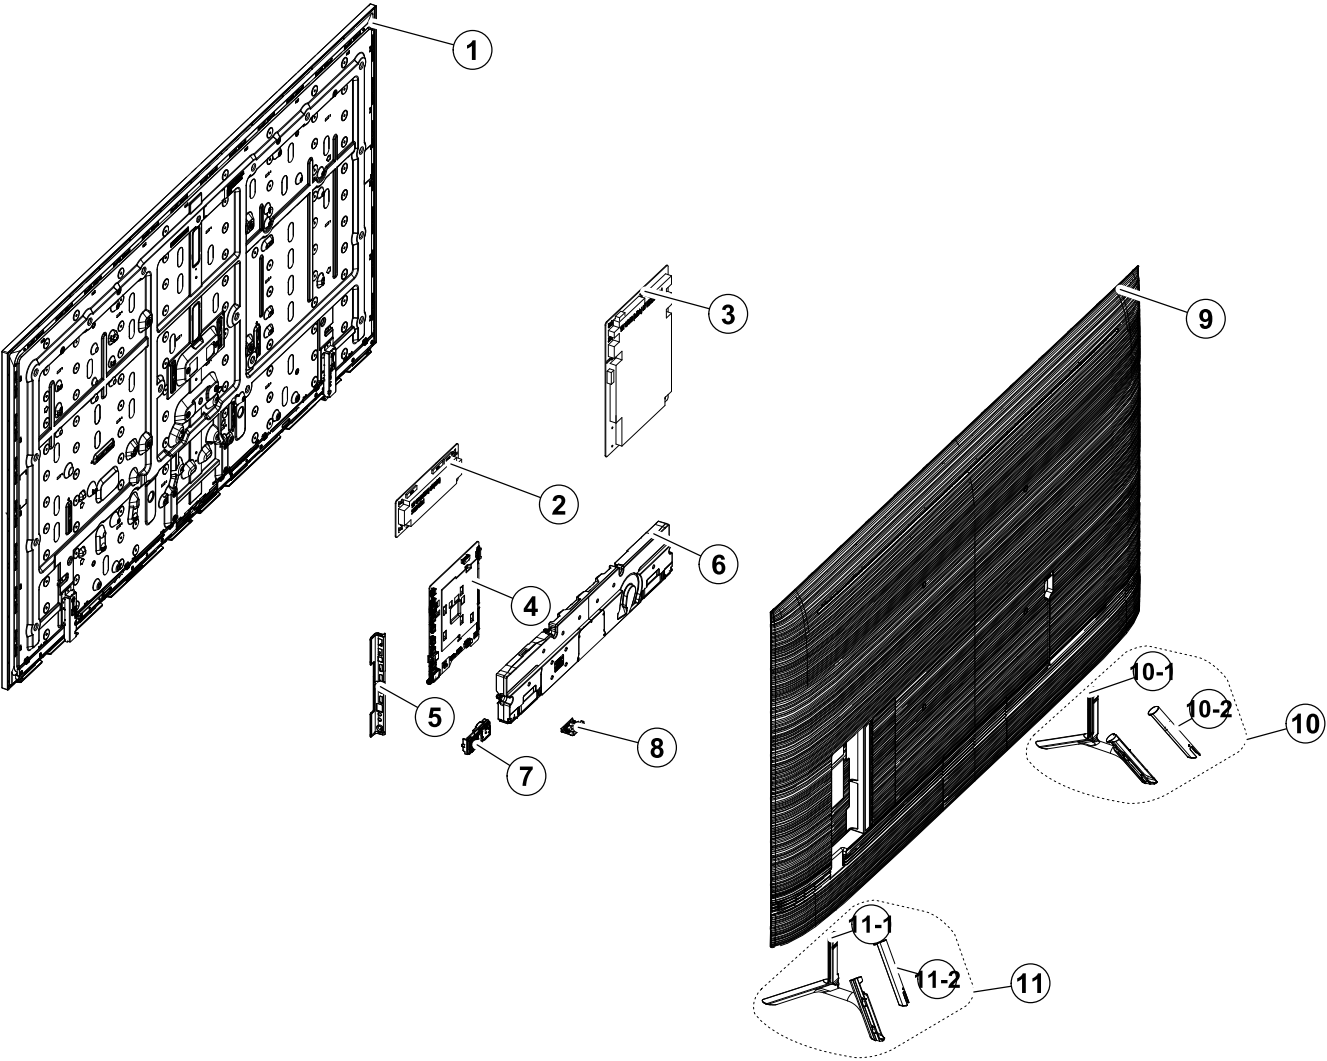

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-05500A	PRODUCT LCD-AUO; CY-TR065FLAV3V/H,Q70,Bas	SA	1
2	5		BN44-00978D	DC VSS-DRIVER BOARD; L65S7ND_RHS,DC/DC,14	SA	1
3	2		BN44-00982A	DC VSS-POWER BOARD; L65S7NA_RHS,AC/DC,242	SA	1
4	2	M0014	BN94-14345G	ASSY PCB MAIN; QRQ70D	SA	1
5	3		BN63-18049B	COVER-TERMINAL SIDE; 65QRQ60T,PC+ABS,V-0,	SA	1
6	2		BN96-48259A	ASSY SPEAKER P-FRONT; TV-SPK,Q70,6ohm,10W	SA	1
7	2		BN59-01314A	NETWORK-WLAN CLIENT; WCP730M,78.3x29.3x7.	SA	1
8	2		BN96-48726A	ASSY BOARD P-FUNCTION TACT; Y19 Q70 Funct	SA	1
9	2	R001A	BN96-48313C	ASSY COVER P-REAR; 65QRQ70D,PC+ABS+ED20%,	SA	1
10	2		BN96-48195A	ASSY STAND P-BRACKET BOTTOM RIGHT; 65QRQ7	SA	1
10-1	3		BN61-16072A	BRACKET-STAND BOTTOM RIGHT; 65QRQ70D,ALDC	SNA	1
10-2	3		BN63-17472C	COVER-STAND TOP REAR RIGHT; 65QRQ70D,ABS,	SNA	1
11	2		BN96-48196A	ASSY STAND P-BRACKET BOTTOM LEFT; 65QRQ70	SA	1
11-1	3		BN61-16071A	BRACKET-STAND BOTTOM LEFT; 65QRQ70D,ALDC,	SNA	1
11-2	3		BN63-17479C	COVER-STAND TOP REAR LEFT; 65QRQ70D,ABS,H	SNA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			QE65Q70RATXXC (AA02)		
1		BN90-10369A	ASSY W/I;QRQ70D	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-17090D	A/S PART SET-MECH W/I;QRQ70D,Q65RD*	1	SNA
1	S001A	BN90-10794D	ASSY STAND;QRQ70D	1	SNA
.2		BN96-48195A	ASSY STAND P-BRACKET BOTTOM RIGHT;65QRQ7	1	SA
..3		BN61-04692A	ADHESIVE-AA;94PRIMER,CLEAR,C043	0	SNA
..3		BN61-16072A	BRACKET-STAND BOTTOM RIGHT;65QRQ70D,ALDC	1	SNA
..3		BN63-17418C	SHEET-PROTECTION COVER;NU7K,PO,T0.05,W30	0	SNA
..3		BN63-17472C	COVER-STAND TOP REAR RIGHT;65QRQ70D,ABS,	1	SNA
..3	RF01	BN67-00538A	FOOT-RUBBER;LED_J4000,Si,GRAY,T3	4	SNA
..3		BN68-05603A	LABEL-E PASS;ART,W/W,90g	2	SNA
..3		BN69-18145A	BAG ACCESSORY;HDPE,T0.03,L250,W350,WHITE	2	SNA
.2		BN96-48196A	ASSY STAND P-BRACKET BOTTOM LEFT;65QRQ70	1	SA
..3		BN61-16071A	BRACKET-STAND BOTTOM LEFT;65QRQ70D,ALDC,	1	SNA
..3		BN63-17479C	COVER-STAND TOP REAR LEFT;65QRQ70D,ABS,H	1	SNA
1	R001A	BN90-10811J	ASSY COVER REAR;QRQ70D	1	SNA
.2	R001A	BN96-48313C	ASSY COVER P-REAR;65QRQ70D,PC+ABS+ED20%,	1	SA
..3	R001	BN63-17987C	COVER-REAR;65QRQ70D,PC+ABS+ED20%,V-1,BLA	1	SNA
...4		0103-010818	RESIN PC ABS;CM20G/BK00749,BLACK,BK0007,	4750	SNA
..3		BN64-04171D	INLAY-TERMINAL SIDE;65QRQ60T,PET,T0.125,	1	SNA
..3		BN68-03518W	LABEL-STICKER CI SLOT;43UNU7090P,PET,T0.	1	SNA
1	M0017	BN91-21116F	ASSY CHASSIS;QRQ70D	1	SNA
.2	M0014	BN94-14345G	ASSY PCB MAIN;QRQ70D	1	SA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		BN62-00874A	HEAT SINK-PS;QN65Q70RAFXZA,A1050,T1.5,W1	1	SNA
..3		BN63-18049B	COVER-TERMINAL SIDE;65QRQ60T,PC+ABS,V-0,	1	SA
...4		0103-005041	RESIN PC ABS;FR3200TV/901408,Black,BK000	18	SNA
..3		BN97-15724A	ASSY DRM;Muse-M built_in,DVB,NagSam, MAC	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-00961A	KEY CODE;Muse-M built_in,Nagra CSC Data,	1	SNA
...4		BN46-00963A	KEY CODE;Muse-M built_in,CI PLUS,Samsung	1	SNA
..3		BN97-15775F	ASSY SMD;QRQ70D	1	SNA
...4		0202-001976	SOLDER-CREAM;LST-309M-K21,D20~38um,96.5S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	4	SNA
...4		0403-001797	DIODE-ZENER;NZH3V0B,2.85~3.15V,500mW,SOD	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	1	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	3	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	3	SA
...4		0404-001976	DIODE-SCHOTTKY;SV540,40V,5000mA,TO-277,T	1	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	6	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2V,24.5V,5MAV,30	1	SNA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	2	SA
...4		0406-001786	DIODE-TVS;PIEC5V0V6TM,5V,7V,8V,0.1MAV,9V	1	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	6	SC
...4		0501-000462	TR-SMALL SIGNAL;MMBT2907A,PNP,350mW,SOT-	2	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7K,S	1	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002790	FET-SILICON;ZXMP6A17G,P,60V,-4.3A,0.190o	1	SA
...4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	3	SA
...4		0505-003620	FET-SILICON;AOD4286,N,100V,14A,55.5mohm,	1	SA
...4		0505-003752	FET-SILICON;PIL9409,P,30V,50A,0.035ohm,3	3	SNA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		0903-002242	IC-MICROCONTROLLER;UEI1704,QFN,20P,4x4x0	1	SA
...4		1003-003029	IC-LEVEL DRIVER;VLS3GM,QFN,40P,6x6x0.9mm	1	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002989	IC-DDR4 SDRAM;MT53E384M32D2DS-053 WT:E,L	1	SA
...4		1105-002992	IC-DDR4 SDRAM;MT53E256M32D2DS-053 WT:B,L	1	SA
...4		1201-004170	IC-AUDIO AMP;TAS880021A,TSSOP,48P,12.5x6	2	SA
...4		1201-004217	IC-OP AMP;TLV9062,SOP,ST,8P,DUAL,PLASTIC	1	SA
...4		1203-008918	IC-DC/DC CONVERTER;TPS65235,WQFN,20P,3x3	1	SA
...4		1203-008920	IC-DC/DC CONVERTER;SYD105ADC,TSOT23,6P,2	1	SA
...4		1203-009059	IC-DC/DC CONVERTER;VPM2GM,QFN,56P,7x7x0.	1	SA
...4		1203-009186	IC-POS1.ADJUST REG.;TLV759P01PDRVR,TP,6P	3	SA
...4		1203-009188	IC-VOL. DETECTOR;G623F11U,TP,8P,4.9x6x1.	1	SA
...4		1203-009193	IC-DC/DC CONVERTER;SYD113IADC,TSOT23-6,6	3	SA
...4		1203-009194	IC-DC/DC CONVERTER;SYD104IADC,TSOT23-6,6	1	SA
...4		1203-009197	IC-DC/DC CONVERTER;RT6203E,SOP-8,8P,5x4x	1	SA
...4		1203-009198	IC-DC/DC CONVERTER;TPS549A20,VQFN-CLIP,2	1	SA
...4		1204-003775	IC-DECODER;SDP1803,FCBGA,929P,31x31x2.19	1	SA
...4		1205-004692	IC-SWITCH;TPS2069CDBVR,SOT-23,5P,2.9x2.8	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	1	SA
...4		1205-005749	IC-SWITCH;G2897KD1U,TDFN2X3-14,14P,2x3mm	1	SA
...4	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1MWC,TP,1.6x	1	SNA
...4		1405-001185	VARISTOR;500V,24VDC,1608,TP,150V,0.055pF	1	SA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	15	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1608,TP,25V,500pF	3	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	2	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608,T0.45	11	SA
...4		2007-000147	R-CHIP;8.2Kohm,5%,1/16W,TP,1005,T0.35	1	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	32	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	8	SA
...4		2007-000816	R-CHIP;390Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	3	SA
...4		2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005,T0.35	5	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	22	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007013	R-CHIP;9.1Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.25	21	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005,T0.35	4	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	64	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	11	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	37	SNA
...4		2007-007231	R-CHIP;110Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	21	SNA
...4		2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	4	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005,T0.35	6	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	12	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005,T0.35	6	SA
...4		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005,T0.35	21	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	8	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005,T0.3	3	SA
...4		2007-007643	R-CHIP;2Mohm,1%,1/10W,TP,1608	1	SA
...4		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005,T0.35	26	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	4	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005,T0.35	8	SA
...4		2007-007992	R-CHIP;1ohm,1%,1/10W,TP,1608	5	SA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008175	R-CHIP;330ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005,T0.35	17	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005,T0.35	11	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	12	SA
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	14	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	7	SA
...4		2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,TP,1.0x1.0	1	SA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	3	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005,T0.5	7	SA
...4	AD480	2203-000254	C-CER,CHIP;10nF,10%,16V,X7R,TP,1005,T0.5	1	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,T0.	5	SA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	10	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005,T0	3	SA
...4	AD480	2203-001072	C-CER,CHIP;0.056nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	2	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	19	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	SNA
...4	AD480	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-005057	C-CER,CHIP;0.0082nF,0.25pF,50V,C0G,TP,10	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	8	SA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,C0G,TP,1005,T0.	3	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005,T0.	57	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,T0.	84	SNA
...4	AD480	2203-006377	C-CER,CHIP;4700nF,10%,25V,X5R,TP,2012	2	SNA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005,T0	26	SNA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	9	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005,T0	14	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	1	SA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,T	12	SNA
...4	AD480	2203-007230	C-CER,CHIP;47000nF,20%,6.3V,X5R,TP,2012,	9	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	46	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	19	SA
...4	AD480	2203-007271	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1005,T0	14	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,T	24	SNA
...4	AD480	2203-007393	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1005,T0	20	SNA
...4	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	4	SA
...4	AD480	2203-007425	C-CER,CHIP;2200nF,10%,25V,X5R,TP,1608	1	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	28	SA
...4	AD480	2203-007795	C-CER,CHIP;10000nF,20%,10V,X5R,TP,1005,T	43	SA
...4	AD480	2203-007809	C-CER,CHIP;22nF,10%,50V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	3	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	22	SA
...4	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,T1	2	SNA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1.35Ohm,35mA,15,M	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1.4Ohm,15	7	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	5	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	8	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	3	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,T4.5,0.024Oh	2	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,T4.5,0.03Ohm	1	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10.7x10mm,T3.8,0.0	1	SA
...4		2703-005715	INDUCTOR-SMD;820nH,20%,11x10mm,T3.8,0.00	1	SNA
...4		2801-004021	CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,12pF,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3301-001364	BEAD-SMD;1000ohm,1608,TP,1085ohm/108MHz,	2	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	52	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	6	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	1	SNA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	4	SA
...4		3707-001123	CONNECTOR-OPTICAL;ANGLE,SPDIF,2.5PI	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-007803	HEADER-BOARD TO CABLE;BOX,12P,1R,1.25mm,	1	SA
...4		3711-007975	CONNECTOR-HEADER;BOX,10P,1R,1.25mm,SMD-A	1	SA
...4	EH01	3711-008488	HEADER-BOARD TO CABLE;BOX,14P,2R,2mm,ANG	1	SA
...4	EH01	3711-008659	HEADER-BOARD TO CABLE;BOX,16P,2R,2mm,ANG	1	SA
...4		3711-009106	CONNECTOR-HEADER;BOX,20P,2R,2mm,ANGLE,SN	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	2	SA
...4		6302-001376	GASKET-SMD;SMT Gasket,Sn/Cu plated PI-Fi	8	SNA
...4		BN40-00333C	TUNER-DTV AIR CABLE SAT;GT2S2-9D31,DVB-T	1	SA
...4		BN41-02695A	PCB-MAIN;MUSE-M Built-In,FR-4,4L,T1.6,l,	1	SNA
...4	CB07	BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SNA
...4		BN97-15658A	ASSY MICOM;T-MSMDEUC,ASSY MICOM-MAIN,QRQ	1	SNA
....5		1107-002641	IC-EMMC;SDINBDG4-8G-945D,8GBYTE,64GBx1,B	1	SNA
...4		BN97-15834A	ASSY MICOM;Muse-M built_in TCON FW	1	SNA
....5		1107-002339	IC-NOR FLASH;W25Q80DV,8Mbit,SOP,5.28x5.2	1	SNA
....5		BN46-00966A	S/W MICOM;TCON FW,Muse-M built_in	1	SNA
...4		BN97-15835A	ASSY MICOM;MMMICOM_TV,Q70/Q80,1107-00222	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...3		BN97-15832A	ASSY MICOM;65L1AU7TN,65inch AUO Q70/Q80	1	SNA
...4		BN46-00958A	S/W MICOM;R65L1UQM,Muse-M built_in,Q70	1	SNA
1		BN91-21117E	ASSY SHIELD;QRQ70D	1	SNA
.2	SCREW	6003-001819	SCREW-TAPTYPE;CH,+,B,M3,L6,ZPC(BLK),SWRC	2	SA
.2		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	1	SNA
.2		BN39-02207C	LEAD CONNECTOR-POWER;78KS9800,UL21016,20	1	SA
.2		BN39-02402A	LEAD CONNECTOR-DIMMING;65/75Q8F,UL21016,	1	SA
.2		BN39-02404A	LEAD CONNECTOR-DIMMING;75Q8F,UL21016,18P	1	SA
.2		BN39-02457B	LEAD CONNECTOR-SUB ASSY;Q70,UL21016,12P,	1	SA
.2		BN39-02465B	LEAD CONNECTOR-SUB ASSY;65 75 82 Q70,UL2	1	SA
.2		BN44-00982A	DC VSS-POWER BOARD;L65S7NA_RHS,AC/DC,242	1	SA
.2		BN59-01314A	NETWORK-WLAN CLIENT;WCP730M,78.3x29.3x7.	1	SA
.2		BN61-15579A	HOLDER-WIFI;65UNU8000F,ABS,BK0007,HB	1	SNA
..3		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	11	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN96-39820H	FFC CABLE;65/75NU8000,Fold,L500,96P,-	1	SA
.2		BN96-39903C	FFC CABLE;65/75NU8000,Fold,L650,96P,-	1	SA
.2		BN96-48259A	ASSY SPEAKER P-FRONT;TV-SPK,Q70,6ohm,10W	1	SA
.2		BN96-48726A	ASSY BOARD P-FUNCTION TACT;Y19 Q70 Funct	1	SA
1		BN92-23844A	ASSY LABEL POP;QRQ70D	1	SNA
.2		BN68-09615B	LABEL POP-HIGHLIGHT;55Q90R,PET,T0.1,W138	1	SNA
1		BN92-24817F	ASSY P/MATERIAL;QRQ60T	1	SNA
.2		6902-003081	BAG ROLL;HDPE/PE FOAM,T0.015/T0.5,W1600,	2	SNA
.2		6922-000013	BAND;PP,T0.8,W18,L2300 M,TRP	6	SNA
.2		6932-000004	WRAP;T0.023,W750,L1000m,non stretched fi	4	SNA
.2		BN69-17449C	PAD PACKING;LED,PAPER,T3,W50X50,L2000,YE	0	SNA
.2		BN69-19156A	CUSHION-SET FRONT;65QRQ70D,EPS,16.7g/l,W	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	478	SNA
.2		BN69-19169A	CUSHION-SET SIDE;65QRQ70D,EPS,16.7g/l,WH	2	SNA
.2		BN69-19546A	PALLET-WOODEN;QE65Q80,WOOD,W1170,L1620,H	0	SNA
.2		BN74-00008D	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	2	SNA
.2		BN96-45139B	ASSY PACKING P-PAD;65Q7F,PP/EPE,WITH WAR	2	SNA
..3		BN68-08908A	LABEL WARNING;ALL MODEL,ART,W70,L100,90g	2	SNA
..3		BN69-16841B	PAD-EPE;65Q7F,EPE,T1.2/T3,W100,L810,MIXE	2	SNA
.2		BN96-49210A	ASSY PACKING P-CUSHION SET;65Q70,EPS+BOX	1	SNA
..3		BN69-19167A	CUSHION-SET;65QRQ70D,EPS,16.7g/l,WHITE,B	1	SNA
..3		BN69-19292A	BOX UNIT-IN;65QRQ70D,CB,DW1,C1,L1922,W51	1	SNA
.2		BP61-00492A	TAPE-SINGLE FACE;ACRYL,T0.25,W80,L33M,CL	1	SNA
1		BN92-25638A	ASSY BOX;QRQ70D	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,W60,L110,WHT,NO SILK,9	1	SNA
.2		BN69-19291H	BOX UNIT-OUT;65QRQ70D,CB,DW4,F3,L1592,W1	1	SNA
1	ACCE1	BN92-25699J	ASSY ACCESSORY;URU8000F	1	SNA
.2		BN96-48814F	ASSY ACCESSORY MANUAL CABLE;QRQ70D	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-001118	POWER CORD-DT;EUR,2P-F,250V,2.5A,BLK,L15	1	SA
..3		4301-000101	BATTERY-ALKALINE;1.5V,1650mAh,LR6,14.5x5	2	SNA
..3		BN59-01312B	REMOCON-SMART CONTROL;2019 TV,SAMSUNG,21	1	SA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
..3		BN68-02989A	LABEL ETC;ALL MODEL,ALL,ART,W65,L30,65X3	1	SNA
..3		BN68-07598A	LEAFLET-REGULATORY GUIDE;QT/UT/LFD/LM/HD	1	SNA
..3		BN68-08112A	LABEL-SECURITY;ALL,PET,T0.05,W55,L52,GLO	1	SNA
..3		BN68-09371A	LEAFLET-REGULATORY GUIDE;QT/UT,W/W,MOJO,	1	SNA
..3		BN68-09490D	MANUAL USERS;Q70R,XC,SPAIN,MOJO,0,1 COLO	1	SNA
..3		BN68-09505A	LEAFLET-ACCESSORY KIT;Q70R Q80R Q60R RU8	1	SNA
..3		BN69-13935A	BAG ACCESSORY;LDPE,T0.07,L350,W700,Trans	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3	EH03A	BN96-49241A	ASSY HOLDER P-RING;Q70,Q80,Q85,ABS,BK000	1	SA
...4		6902-000683	BAG PE;LDPE,T0.05,W60,L60,TRP,Bio. N,Zip	1	SNA
...4		BN61-16284A	HOLDER-WALL RING;65QRQ70D,ABS,T2,BK0007,	4	SNA
1		BN92-25848D	ASSY LABEL;QRQ70D	1	SNA
.2		BN68-06708G	LABEL-RATING;Monitor,WW,PP,T0.161,W93,L7	1	SNA
.2		BN68-07519B	LABEL-ENERGY;ALL JORDAN,WW,PP,T0.135,W60	1	SNA
.2		BN68-09500A	LEAFLET-QUICK SETUP GUIDE;Q70R,OTHERS,WW	1	SNA
1		BN95-05641A	PRODUCT LCD DP;DP,BN95-05500A,CY-TR065FL	1	SA
.2		BN92-26172A	ASSY P/MATERIAL;CY-TR065FLLV4H,inhouse	1	SNA
...3		6902-002860	BAG PANEL;LDPE,T0.08,W1600,L1100,TRP,REC	1	SNA
...3		BN68-09258B	LABEL ETC;ALL MODEL,PET,T0.05,W40,L40,YW	1	SNA
...3		BN69-19059B	CUSHION-PANEL;65QRQ80C,EPS,EPS,30.3g/l,W	0	SNA
...4		0103-005099	RESIN EPS;BASF303,Natural,Natural	1083	SNA
...3		BN69-19557A	PALLET-WOODEN;65" inhouse LCM,EUR type,W	0	SNA
.2	PANEL	BN95-05500A	PRODUCT LCD-AUO;CY-TR065FLAV3V/H,Q70,Bas	1	SA
...3	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3,L5.0,ZPC(WHT),SWR	6	SA
...3	SCREW	6001-003083	SCREW-MACHINE;CH,+,M3,L8,ZPC(BLK),SWRCH1	11	SA
...3	M0131	BN63-00520A	GASKET-EMI;APPOLO _PAL,Conductive Fabric,	2	SNA
...3		BN63-18090A	COVER-SOURCE PCB RIGHT;65QRQ80C,EGI-SECC	1	SNA
...3		BN63-18091A	COVER-SOURCE PCB LEFT;65QRQ80C,EGI-SECC,	1	SNA
...3		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
...3		BN90-10344A	ASSY BACK LIGHT UNIT;65QRQ70D	1	SNA
...4		BN02-00582A	TAPE SINGLE FACE;Q9F,PET,T0.21,W15,L15,W	1	SNA
...4		BN61-15642A	DIFFUSER PLATE;18Y_Q9F_65INCH_D.PLATE,PS	1	SNA
...4		BN61-16179A	OPTICAL SHEET-COMPLEX;19Y_65inch_Q70_COM	1	SNA
...4		BN61-16180A	OPTICAL SHEET-DIFFUSER;19Y_65inch_Q70_di	1	SNA
...4		BN61-16181A	OPTICAL SHEET-HIGH COLOR;19Y_65inch_Q70_	1	SNA
...4		BN96-48171C	ASSY CHASSIS REAR P;65QRQ70D,EGI-SECC,NA	1	SNA
....5		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	4	SNA
....5		BN02-00586A	TAPE DOUBLE FACE;UNU7100X,ACRYL,T0.3,W3,	6	SNA
....5		BN44-00978D	DC VSS-DRIVER BOARD;L65S7ND_RHS,DC/DC,14	1	SA
....6		BN97-00031J	ASSY MICOM-LD_FW;Y19_S78_AS3824,19Y_Q70_	1	SNA
....5		BN61-16135A	FRAME-CHASSIS REAR LEFT RIGHT;65QRQ80C,P	2	SNA
....6		0103-011284	RESIN PC;LS-3104G/FW9931,White,WT0134,V-	160	SNA
....5		BN61-16161A	SUPPORT-PLATE;75QRQ80C,PC,V-2,WHITE,OD14	19	SNA
....6		0103-011417	RESIN PC;SA-1220/FW9767,White,WT0135,V-2	76	SNA
....5		BN61-16182A	OPTICAL SHEET-REFLECTOR;19Y_65inch_Q70_R	1	SNA
....5		BN74-00053E	TAPE-SINGLE FACE;PAPER,3M2307,T0.14,W20,	0	SNA
....5		BN96-48090A	ASSY LED BAR P;Q70_65INCH,ALUMINUM,Q70_D	24	SNA
....5		BN96-48171A	ASSY CHASSIS REAR P;65QRQ70D,EGI-SECC,NA	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....6		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	0	SNA
....6		BN02-00352B	TAPE-SINGLE FACE;PET,T0.05,W30,L50M,BLAC	0	SNA
....6		BN60-00920M	SPACER-FOAM;55H8000,PU FOAM,L50M,BLACK,T	4	SNA
....6		BN60-01459A	SPACER-SILICONE;55PMF,Si,L10,WHITE,T1.8,	2	SNA
....6		BN60-01637A	SPACER-FOAM;65QRQ80C,PU FOAM,L26,BLACK,T	3	SNA
....6		BN61-09771A	HOLDER-SCREW;Y13 OLED CURVED 55",SWRCH18	1	SNA
....6		BN61-13557P	BRACKET-WIRE;75QNQ8CB,SW-C,T1,SILVER,L66	5	SNA
....6		BN61-13557T	BRACKET-WIRE;65UNU7100X,SW-C,T1,SILVER,L	3	SNA
....6		BN61-13557X	BRACKET-WIRE;65UNU7100X,SW-C,T1,SILVER,L	2	SNA
....6		BN61-16027A	HOLDER-SOURCE PCB;75QRQ80C,ABS,BK0007,HB	8	SNA
.....7		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	120	SNA
....6		BN61-16133A	FRAME-CHASSIS REAR TOP;65QRQ80C,PC+GF10%	1	SNA
....6		BN61-16134A	FRAME-CHASSIS REAR BOTTOM;65QRQ80C,PC+GF	1	SNA
.....7		0103-011284	RESIN PC;LS-3104G/FW9931,White,WT0134,V-	445	SNA
....6		BN63-18150B	INSULATOR-SMPS;65QRQ80C,PC,BLACK,L265,W3	1	SNA
....6		BN63-18151B	INSULATOR-SMPS;65QRQ80C,PC,BLACK,L260,W1	1	SNA
....6	CC04	BN64-04162A	CHASSIS-REAR;65QRQ80C,EGI-SECC,-,T0.8,NA	1	SNA
.....7		BN01-00609A	STEEL;65RQ80,EGI-SECC,L0,0.8mm,900mm,AG	8	SNA
.....7	CB20	BN61-11982C	BRACKET-WALL;65QNQ7FC,CR-SPCC,BLACK,M8,L	4	SNA
....6		BN96-48150A	FFC CABLE;19Y Q70 65,Fold,L520,68P,#1	1	SNA
....6		BN96-48151A	FFC CABLE;19Y Q70 65,Fold,L670,68P,#2	1	SNA
....6		BN96-48277A	ASSY PCB P-LED INTERFACE BOARD;19Y Q70 6	1	SNA
...4		BN96-48193A	ASSY FRAME P-MIDDLE BOTTOM;65QRQ80C,PC+G	1	SNA
....5		0201-003279	ADHESIVE-AA;UPUV,CLEAR	1	SNA
....5		BN02-00486A	TAPE-DOUBLE FACE;PU FOAM,T0.5,W3.2,L33M,	2	SNA
....5		BN60-01115B	SPACER-CONDUCTIVE;Y15 J4101,CONDUCTIVE F	2	SNA
....5		BN61-16136A	FRAME-MIDDLE BOTTOM;65QRQ80C,PC+GF10%,V-	1	SNA
....6		0103-007368	RESIN PC;LS-3104G,K2495,BK0048,3.0mm V-2	58	SNA
..3		BN91-20705A	ASSY OPEN CELL-DECORATION;BN63-16356,Y19	1	SNA
...4		0201-003164	ADHESIVE-UV;190024,CLEAR,UV, Acrylic	2	SNA
...4	FD01	BN63-16356A	COVER-DECORATION;65Q7F,STS304,T0.15,SILV	1	SNA
...4		BN96-48083A	ASSY OPEN CELL;AUO,65Inch,Y19 New opence	1	SNA
....5		BN81-15647A	A/S OPEN CELL-ADHESIVE-A.C.F;T500QVN03,4	1	SNA
....5		BN81-17404A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,46	1	SNA
....5		BN81-17405A	A/S-ASSY PCB-SOURCE (F-L);ASSY PCB-SOURC	1	SNA
....5		BN81-17406A	A/S-ASSY PCB-SOURCE (F-R);ASSY PCB-SOURC	1	SNA
....5		BN81-17407A	A/S-ASSY PCB-SOURCE (B-L);ASSY PCB-SOURC	1	SNA
....5		BN81-17408A	A/S-ASSY PCB-SOURCE (B-R);ASSY PCB-SOURC	1	SNA
....5		BN81-17409A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,47.23T	1	SNA
....5		BN81-17411A	A/S-POLARIZER-C/F;POLARIZER-C/F,66.C4U57	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN81-17413A	A/S-POLARIZER-TFT;POLARIZER-TFT,66.T4U58	1	SNA
..3		BN96-48186A	ASSY CHASSIS FRONT P;65QRQ70D,Al,Slate B	1	SNA
...4		6001-002912	SCREW-MACHINE;CH,+,M3,L3,ZPC(BLK),SWRCH1	6	SA
...4		BN02-00074E	TAPE SINGLE FACE;U7201,PET,T0.05,W10,L20	4	SNA
...4		BN02-00486A	TAPE-DOUBLE FACE;PU FOAM,T0.5,W3.2,L33M,	3	SNA
...4		BN02-00489A	TAPE SINGLE FACE;55KS7500,PET,T0.22,W3,L	3	SNA
...4		BN60-01539E	SPACER-FOAM;PU FOAM,L13.5,BLACK,T0.5,W3	2	SNA
...4		BN60-01612B	SPACER-CONDUCTIVE;65QNQ7FC,CONDUCTIVE FA	2	SNA
...4		BN61-09308A	ADHESIVE-TP;F8K,GREEN,ACRYL	0	SNA
...4		BN61-16092A	BRACKET-CORNER TOP;75QRQ90B,PCM,T0.4,BLA	2	SNA
...4		BN61-16093A	BRACKET-CORNER BOTTOM;75QRQ90B,PCM,T0.4,	2	SNA
...4		BN63-17419J	SHEET-PROTECTION COVER;Q9S,PO,T0.04,W15,	3	SNA
...4		BN64-04156A	CHASSIS-FRONT BOTTOM;65QRQ80C,PC+GF10%,V	1	SNA
...4	AC155	BN64-04157B	CHASSIS-FRONT;65QRQ70D,Al,-,NATURAL,SL	1	SNA
..3		BN96-49266A	ASSY STAND P-BRACKET LINK RIGHT;65QRQ70D	1	SNA
...4		BN60-00162Y	SPACER-FOAM;PE FOAM,L50M,GRAY,T0.35,W10	0	SNA
...4		BN61-16111A	BRACKET-STAND LINK RIGHT;65QRQ70D,EGI-SE	1	SNA
....5		6041-001068	RIVET-PH;6SR000032004301_Cr3+WH,SWRCH10A	2	SNA
....5		BN61-14662A	BRACKET-STAND LINK REAR;55MU7000,SK5,T0.	2	SNA
..3		BN96-49267A	ASSY STAND P-BRACKET LINK LEFT;65QRQ70D,	1	SNA
...4		BN61-16112A	BRACKET-STAND LINK LEFT;65QRQ70D,EGI-SEC	1	SNA
.2		BN98-04426A	ASSY K/D-PACKING;inhouse used models 201	1	SNA
..3		BN02-00138B	SILICAGEL;100GR,NON-WOVEN FABRIC BAG,100	0	SNA