


1. TQ65Q70CATXXC FA01

TQ65Q70CATXXC FA01

Exploded View

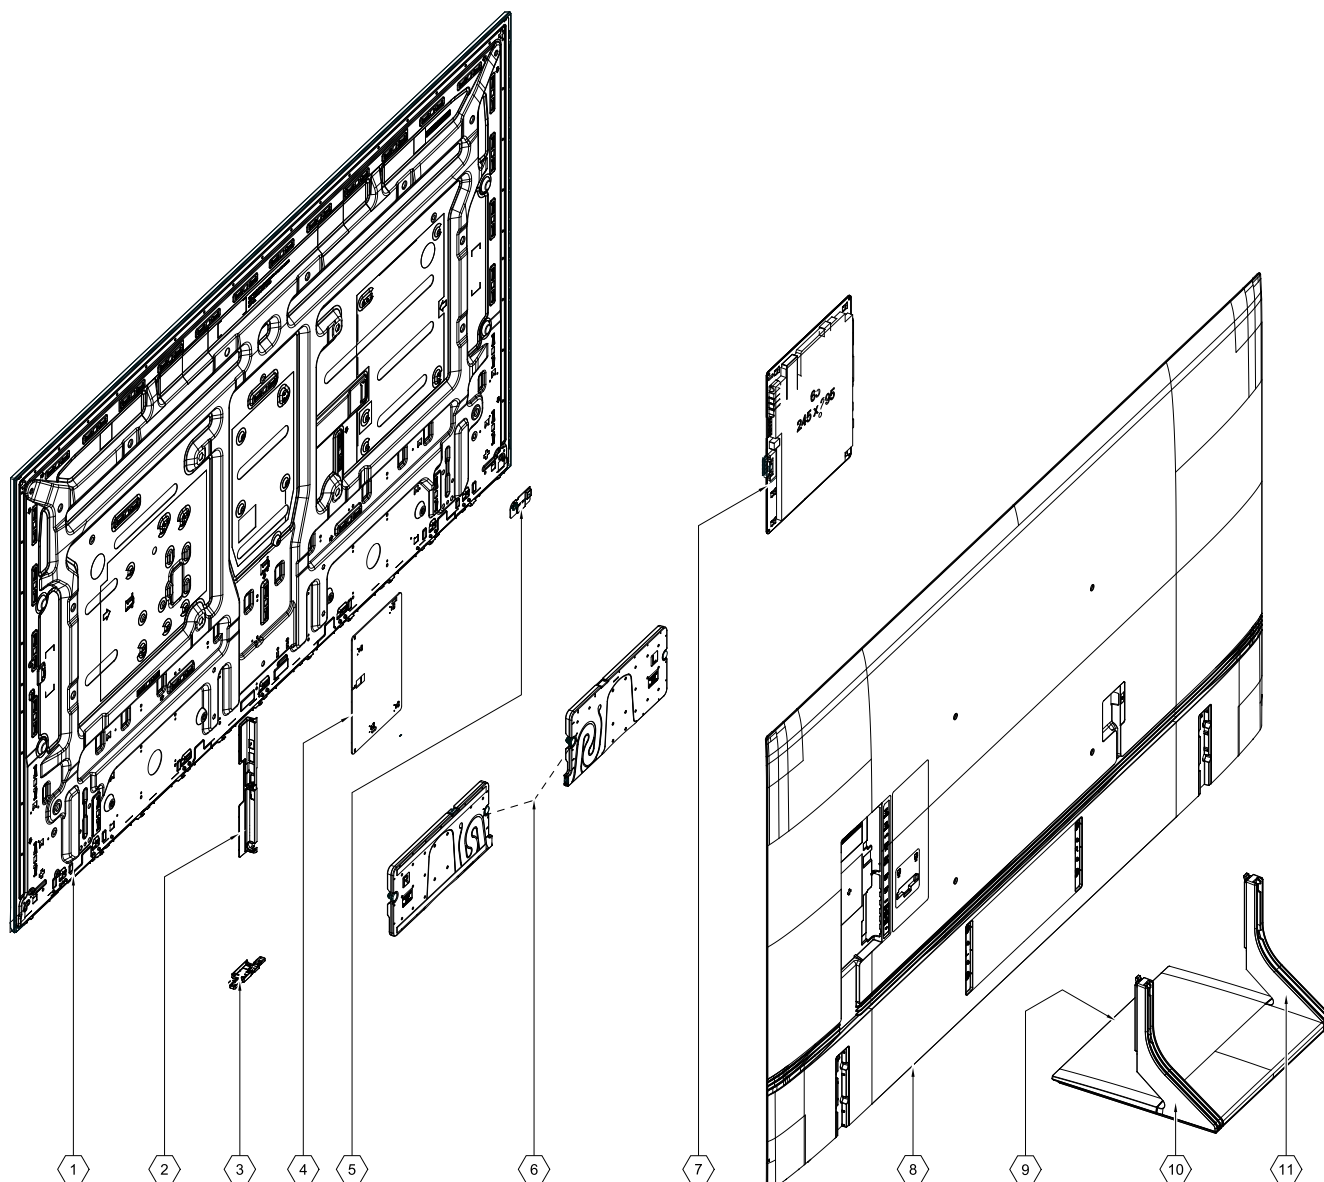

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-09773A	PRODUCT LCD-SDC; CY-QC065FGLV1H/V,Q70CH,B	SA	1
2	2	TERMINAL	BN63-19384B	COVER-TERMINAL SIDE; 65QAQ70F,PC+ABS,V-0,	SA	1
3	2	WLAN	BN59-01401A	NETWORK-WLAN CLIENT; WCB737M,90.83x20.91x	SA	1
4	2	MAIN	BN94-18048W	ASSY PCB MAIN; Q70CH	SA	1
5	5	IOT	BN59-01435A	NETWORK-IOT HUB; WIC212S,57x25x6mm,IOT HU	SA	1
6	2	P-SPEAKER	BN96-52483A	ASSY SPEAKER P-FRONT; TV-SPK,65QAQ60G,2ch	SA	1
7	2	POWER	BN44-01106C	DC VSS-PD BOARD; L65E8N_BHS,AC/DC,242.2W,	SA	1
8	2	P-REAR	BN96-54883B	ASSY COVER P-REAR; 65Q70BG,PC+ABS+ED20%,V	SA	1
9	2	P-C/DECO	BN96-56596B	ASSY STAND P-COVER DECORATION; 65Q70CH,AB	SA	1
10	2	P-C/T_LEFT	BN96-53104C	ASSY STAND P-COVER TOP LEFT; 65AU9000A,PP	SA	1
11	2	P-C/T_RIGHT	BN96-53106C	ASSY STAND P-COVER TOP RIGHT; 65AU9000A,P	SA	1

2. Electrical Parts List

Electrical Parts List

II

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			TQ65Q70CATXXC (FA01)		
1		BN90-12435Q	ASSY COVER REAR;Q70BG	1	SNA
.2	P-REAR	BN96-54883B	ASSY COVER P-REAR;65Q70BG,PC+ABS+ED20%,V	1	SA
..3	C/REAR	BN63-19947S	COVER-REAR;65Q70BG,PC+ABS+ED20%,T2.4,V-0	1	SNA
...4		0103-011533	RESIN PC ABS;GC-1214A/K21294,Black,BK000	4323	SNA
..3		BN68-03518W	LABEL-STICKER CI SLOT;43UNU7090P,PET,T0.	1	SNA
..3		BN68-05603A	LABEL-E PASS;ART,W/W,90g	3	SNA
1		BN90-12615L	ASSY STAND;Q70CH	1	SNA
.2	P-C/T_LEFT	BN96-53104C	ASSY STAND P-COVER TOP LEFT;65AU9000A,PP	1	SA
..3		0203-007085	TAPE-SINGLE FACE;PET,T0.05,W20,L100M,CLE	0	SNA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+,-,B,M3,L8,ZPC(BLK),SW	6	SA
..3	SCREW	6003-001347	SCREW-TAPTYPE;FH,+,-,B,M4,L16,ZPC(WHT),SWR	2	SNA
..3		6902-003518	BAG ACCESSORY;LDPE,T0.06,W350,L300,TRP,R	2	SNA
..3	FOOT	BN61-13520D	FOOT-RUBBER;40K5500,Si,GRAY,T3	6	SNA
..3		BN61-17714A	BRACKET-STAND BOTTOM;65AU9000A,HGI,T2,NA	2	SNA
..3	S/T-LEFT	BN63-19401B	COVER-STAND TOP LEFT;65AU9000A,PP+GF40%,	1	SNA
...4		0103-011648	RESIN PP;9500G40/9378C,Titan Gray,GY0357	563	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,ART,-,W10,L25,-,-,-,	3	SNA
..3		BN96-49315B	ASSY ACCESSORY-SCREW;65QAQN90D,ALL,W/W,R	1	SNA
...4	SCREW	6003-001907	SCREW-TAPTYPE;BH,+,-,S,M4,L14,ZPC(BLK),SWR	4	SA
...4		6902-003608	BAG SCREW;LDPE,T0.06,W60,L80,TRP,RECYCLE	1	SNA
.2	P-C/T_RIGHT	BN96-53106C	ASSY STAND P-COVER TOP RIGHT;65AU9000A,P	1	SA
..3	S/T-RIGHT	BN63-19414B	COVER-STAND TOP RIGHT;65AU9000A,PP+GF40%	1	SNA
..3		BN68-05603G	LABEL-E PASS;ART,W15,L60,YELLOW	1	SNA
.2	P-C/DECO	BN96-56596B	ASSY STAND P-COVER DECORATION;65Q70CH,AB	1	SA
..3		6902-003800	BAG ACCESSORY;HDPE/PE FOAM,T0.015/T0.5,W	1	SNA
..3		BN63-20619B	COVER-STAND DECORATION;65Q70CH,ABS,T2.7,	1	SNA
...4		0103-011659	RESIN ABS;HF-0680U/G34312,Titan Gray (Fr	300	SNA
1	CHASSIS	BN91-24426D	ASSY CHASSIS;Q70CH	1	SNA
.2		BN46-02119A	S/W-MODEL;QCQ70,PONTUS-ML,Q70CH	1	SNA
.2	MAIN	BN94-18048W	ASSY PCB MAIN;Q70CH	1	SA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		BN62-00991A	HEAT SINK-PS;KQ65QB70BFXKR,A1050,T1.5,W1	1	SNA
..3		BN97-20441T	ASSY SMD;Q70CH	1	SNA
...4		0202-001830	SOLDER-CREAM;PFM-48W LT-SH,D20~38um,96.5	7	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	4	SNA
...4		0403-001797	DIODE-ZENER;NZH3V0B,2.85~3.15V,500mW,SOD	2	SNA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	2	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	3	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	2	SA
...4		0404-001976	DIODE-SCHOTTKY;SV540,40V,5000mA,TO-277,T	1	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	5	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2V,24.5V,5MAV,30	1	SNA
...4		0406-001568	DIODE-TVS;PESD5V0V1BL,5.8/6.8/7.8V,45W,S	3	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	4	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,6V,9V,0.2MAV,0.7VPA,0	1	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	7	SC
...4		0501-000462	TR-SMALL SIGNAL;MMBT2907A,PNP,350mW,SOT-	2	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,l	2	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	12	SA
...4		0505-003620	FET-SILICON;AOD4286,N,100V,14A,55.5mohm,	1	SA
...4		0505-003752	FET-SILICON;AONR21321,P,30V,50A,0.035ohm	3	SNA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		1001-002144	IC-ANALOG MULTIPLEX;P13USB221EZUAEX,10P,	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,x8,SOP	1	SA
...4		1105-003132	IC-DDR4 SDRAM;K4F2E3S4HA-MGCL,WFBGA,200P	1	SNA
...4		1105-003173	IC-DDR4 SDRAM;H54G38AYRBX259,FBGA,200P,T	1	SNA
...4		1201-004368	IC-OP AMP;LV358G-S08-R,SOP-8,8P,TP,3.95x	1	SNA
...4		1201-004421	IC-AUDIO AMP;WA20-7722,TP,6x6x0.9mm,-25t	1	SNA
...4		1203-008918	IC-DC/DC CONVERTER;TPS65235,WQFN,20P,3x3	1	SA
...4		1203-009312	IC-DC/DC CONVERTER;SYD105I,6P,TSOT23-6,T	1	SNA
...4		1203-009590	IC-VOL. DETECTOR;G623AF11U,8P,TP,TP,4.9x	1	SNA
...4		1203-009643	IC-POS. ADJUST REG.;ET5A0ADJY2B,6P,DFN6,	3	SNA
...4		1203-009649	IC-DC/DC CONVERTER;VPMS3BRT,72P,QFN,TP,8	1	SNA
...4		1203-009652	IC-DC/DC CONVERTER;MP8795HGLE-Z,21P,QFN-	1	SNA
...4		1203-009727	IC-DC/DC CONVERTER;TMI3256,6P,DFN,TP,2x2	1	SNA
...4		1203-009728	IC-DC/DC CONVERTER;TMI3253S,6P,SOT23-6,T	5	SNA
...4		1204-003848	IC-DECODER;Quantum Processor III Neo 31,	1	SNA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	3	SNA
...4		1205-006382	IC-SWITCH;G2898KD1U,14P,TDFN,TP,2x3x0.75	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1MWC,TP,1.6x	1	SNA
...4		1405-001185	VARISTOR;500V,24VDC,1608,TP,150V,0.055pF	1	SA
...4		1405-001232	VARISTOR;6.4V,5.6VDC,30A,1608,TP,19V,200	4	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	9	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	1	SA
...4		1405-001452	VARISTOR;15V,12VDC,8A,1608,TP,46V,18pF	6	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608,T0.45	6	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005,T0.35	3	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005,T0.35	20	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005,T0.35	49	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005,T0.35,Gen	2	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	41	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-000475	R-CHIP;1Mohm,1%,1/10W,TP,1608	1	SA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	8	SA
...4		2007-000929	R-CHIP;470ohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001007	R-CHIP;51Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005,T0.35	19	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005,T0.35	7	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	48	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-003010	R-CHIP;20ohm,5%,1/16W,TP,1005	5	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.35,-	15	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005,T0.35	8	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005,T0.35,Gen	1	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	12	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	70	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007231	R-CHIP;110Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	19	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005,T0.35	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	5	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	4	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005,T0.35	5	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	8	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005,T0.3	3	SA
...4		2007-007697	R-CHIP;2.4Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005,T0.35	8	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	1	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005,T0.35	5	SA
...4		2007-007992	R-CHIP;1ohm,1%,1/10W,TP,1608	2	SA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-008263	R-CHIP;3Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008269	R-CHIP;51Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005,T0.35	6	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-008779	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35,Gener	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	8	SA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4	AD480	2203-000233	C-CER,CHIP;100pF,5%,50V,C0G,TP,1005,T0.5	1	SA
...4	AD480	2203-000278	C-CER,CHIP;10pF,0.5pF,50V,C0G,TP,1005,-5	5	SA
...4	AD480	2203-000359	C-CER,CHIP;150pF,5%,50V,C0G,TP,1005,T0.5	7	SNA
...4	AD480	2203-000425	C-CER,CHIP;18pF,5%,50V,C0G,TP,1005,-55to	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005,T0.5,	6	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005,T0.	1	SA
...4	AD480	2203-000585	C-CER,CHIP;220pF,10%,50V,X7R,TP,1005,T0.	2	SA
...4	AD480	2203-000627	C-CER,CHIP;22pF,5%,50V,C0G,TP,1005,T0.5,	5	SNA
...4	AD480	2203-000812	C-CER,CHIP;33pF,5%,50V,C0G,TP,1005,-55to	14	SA
...4	AD480	2203-000940	C-CER,CHIP;470pF,10%,50V,X7R,TP,1005,T0.	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-001153	C-CER,CHIP;68pF,5%,50V,C0G,TP,1005,T0.5,	1	SA
...4	AD480	2203-001412	C-CER,CHIP;30pF,5%,50V,C0G,TP,1005,-55to	2	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005,-55t	10	SNA
...4	AD480	2203-002525	C-CER,CHIP;560pF,10%,50V,X7R,TP,1005,-55	1	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	6	SA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005,T0.	74	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005,T0.5	2	SNA
...4	AD480	2203-006377	C-CER,CHIP;4.7uF,10%,25V,X5R,TP,2012,-55	1	SNA
...4	AD480	2203-006562	C-CER,CHIP;1uF,10%,10V,X5R,TP,1005,T0.5,	15	SNA
...4	AD480	2203-006698	C-CER,CHIP;1uF,10%,25V,X7R,TP,1608,T0.8,	11	SNA
...4	AD480	2203-006841	C-CER,CHIP;1uF,10%,16V,X5R,TP,1005,T0.5,	3	SNA
...4	AD480	2203-007176	C-CER,CHIP;10uF,10%,16V,X5R,TP,2012,T1.2	5	SNA
...4	AD480	2203-007230	C-CER,CHIP;47uF,20%,6.3V,X5R,TP,2012,T1.	11	SA
...4	AD480	2203-007240	C-CER,CHIP;22uF,20%,6.3V,X5R,TP,1608,T0.	59	SA
...4	AD480	2203-007269	C-CER,CHIP;22uF,20%,10V,X5R,TP,2012,T0.8	13	SA
...4	AD480	2203-007271	C-CER,CHIP;2.2uF,10%,10V,X5R,TP,1005,T0.	3	SNA
...4	AD480	2203-007306	C-CER,CHIP;10uF,10%,25V,X5R,TP,2012,T1.2	18	SNA
...4	AD480	2203-007393	C-CER,CHIP;4.7uF,10%,10V,X5R,TP,1005,T0.	10	SNA
...4	AD480	2203-007423	C-CER,CHIP;10uF,10%,35V,X7R,TP,3216,-55t	7	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	28	SA
...4	AD480	2203-007795	C-CER,CHIP;10uF,20%,10V,X5R,TP,1005,T0.5	31	SA
...4	AD480	2203-007809	C-CER,CHIP;22nF,10%,50V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-008315	C-CER,CHIP;22uF,20%,25V,X5R,TP,2012,T1.2	9	SA
...4	AD480	2203-008412	C-CER,CHIP;4.7uF,10%,50V,X5R,TP,2012,T1.	5	SNA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,T0.8,1.35Ohm	3	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1Ohm,200m	7	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	4	SA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,70647,T3,0.008Ohm,9	1	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	4	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	3	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,T4.5,0.024Oh	2	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,T4.5,0.03Ohm	1	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10.7x10mm,T3.8,0.0	1	SA
...4		2703-005780	INDUCTOR-SMD;10uH,20%,2012,T1.25,0.91Ohm	2	SNA
...4		2703-005781	INDUCTOR-SMD;220nH,20%,7876,T2.9,0.00176	1	SNA
...4		2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50Oh	1	SA
...4		3301-001364	BEAD-SMD;1000ohm/100Mhz,1.6x0.8mm,TP,139	4	SNA
...4		3301-002039	BEAD-SMD;26ohm/100Mhz,1.6X0.8mm,TP,7mohm	36	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	3	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	2	SNA
...4		3701-002024	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	4	SA
...4		3707-001143	CONNECTOR-OPTICAL;ANGLE,SPDIF,Waveless,2	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	1	SA
...4		3708-003355	CONNECTOR-FPC/FFC/PIC;TP,SMD-A,24P,0.5mm	1	SNA
...4		3708-003389	CONNECTOR-FPC/FFC/PIC;TP,SMD-A,10P,0.5mm	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4		3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4		3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,ANG	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	2	SA
...4		6302-001376	GASKET-SMD;SMT Gasket,Si,T6,W4.5,L2.5,SI	10	SNA
...4		BN40-00274A	TUNER-DTV AIR CABLE SAT;GT2S2-22D31,DVB-	1	SA
...4		BN41-03136A	PCB-MAIN;Q70C,FR-4,4L,T1.6,1,23Y PONTUS-	1	SNA
...4		BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SA
...4		BN97-20523A	ASSY MICOM;Q70C,T-PTMLCDEUC	1	SNA
....5		1107-002895	IC-EMMC;THGBMUG6C1LBAIL,BGA,153P,TP,11.5	1	SNA
...4		BN97-20525A	ASSY MICOM;TCON MICOM,Q70C,IC1503_UT	1	SNA
....5		1107-002851	IC-NOR FLASH;GD25Q40ESIGY,SOP,8P,TR,7.9x	2	SNA
...4		BN97-20526A	ASSY MICOM;T-PLBINTV,Q70C,IC1502 (1107-0	1	SNA
..3		BN97-20529A	ASSY MICOM;Q70C	1	SNA
...4		BN46-02122A	S/W;Q70C,COMMON DATA	1	SNA
..3		BN97-20536A	ASSY DRM;PONTUS-ML,DVB,NAGSAM,MAC,HDCP	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-02042A	KEY CODE;PONTUS-ML,Pontus-ML_2-DVB,DVB,N	1	SNA
...4		BN46-02113A	KEY CODE;Y23 PONTUS-ML,Ci+,P-ML_23,Samsu	1	SNA
...4		BN46-02114A	KEY CODE;Y23 PONTUS-ML,Ci+,P-ML_ECP_23,S	1	SNA
1		BN91-24428F	ASSY SHIELD;Q70CH	1	SNA
.2		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L100M,WHI	0	SNA
.2		BN39-02217L	LEAD CONNECTOR-POWER;QN65Q70AAFXZA,UL210	1	SA
.2	POWER	BN44-01106C	DC VSS-PD BOARD;L65E8N_BHS,AC/DC,242.2W,	1	SA
.2	WLAN	BN59-01401A	NETWORK-WLAN CLIENT;WCB737M,90.83x20.91x	1	SA
.2	TERMINAL	BN63-19384B	COVER-TERMINAL SIDE;65QAQ70F,PC+ABS,V-0,	1	SA
..3		0103-005041	RESIN PC ABS;FR3200TV/901408,Black,BK000	16	SNA
.2		BN68-09258D	LABEL ETC;ALL MODEL,PET,T0.05,W42,L30,RE	1	SNA
.2		BN96-39823F	FFC;QN65Q70AAFXZA,Fold,L600,96P	1	SA
.2	P-SPEAKER	BN96-52483A	ASSY SPEAKER P-FRONT;TV-SPK,65QAQ60G,2ch	1	SA
.2		BN96-54739A	FFC;QN65Q60BAFXZA,Fold,L600,24P,Locking	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN96-56601A	FFC;65Q70C,Fold,L400,10P,Main~IoT Module	1	SA
1		BN92-31756R	ASSY P/MATERIAL;Q60CJ	1	SNA
.2		6902-003990	BAG AIR;LDPE,T0.2,W850,L1800,TRP,RECYCLE	0	SNA
.2		6902-004038	BAG ROLL;HDPE/PE FOAM,All 65"Series,T0.0	2	SNA
.2		6922-000421	BAND;PP,T0.8,W18,L2300,TRP,Recycled PIR_	5	SNA
.2		6932-000008	WRAP;LDPE,T0.017,W750,Transparent	3	SNA
.2		BN69-03982V	PACKING ANGLE;ALL,PAPER,T3,W2000,L60,YEL	0	SNA
.2		BN69-21257W	PALLET-WOODEN;65AU8K_9K*,WOOD,W1150,L163	0	SNA
.2		BN69-21717G	PAD PACKING;55" except Q8/Q9"series 65",	0	SNA
.2		BN69-21920C	CUSHION-SET SIDE;65Q70BG,EPS,16.7g/l,WHI	2	SNA
..3		0103-005099	RESIN EPS;BAS303/NP,Natural,Natural,HB	279	SNA
..3		0103-012058	RESIN EPS;RE-710E_P/NATURAL,Natural,NC00	14	SNA
.2		BN69-22276D	PAD-SHEET;65QAQ60G,PET,T3.2,W50,L809,WHI	0	SNA
.2		BN69-23239B	CUSHION-SET FRONT;65Q60BH,EPS,16.7g/l,WH	1	SNA
.2		BN92-00460H	ASSY PACKING-CUSHION-SET + IN-BOX;65BU85	1	SNA
..3		BN69-21909C	CUSHION-SET;65Q70BG,EPS,16.7g/l,WHITE,Re	1	SNA
...4		0103-005099	RESIN EPS;BAS303/NP,Natural,Natural,HB	858	SNA
...4		0103-012058	RESIN EPS;RE-710E_P/NATURAL,Natural,NC00	45	SNA
..3		BN69-22147A	BOX UNIT-IN;65AU8000B,CB,DW1,C1,L1870,W4	1	SNA
1		BN92-31759B	ASSY LABEL POP;Q60CJ	1	SNA
.2		BN68-16214A	LABEL POP-HIGHLIGHT;Q80C,EU/AU/NZ,PET,T0	1	SNA
1		BN92-31769E	ASSY LABEL;Q70CH	1	SNA
.2		BN68-06708G	LABEL-RATING;ALL,WW,PP,T0.1,W93,L73,Dark	1	SNA
.2		BN68-11432A	LABEL-ENERGY;EU,PP,T0.1,W96,L192,INBOX	1	SNA
.2		BN68-11433A	LABEL-ENERGY;EU,ART,T0.1,W96,L192,BOX	1	SNA
.2		BN68-15766A	LEAFLET-QUICK SETUP GUIDE;Q60CJ- Q60C/Q6	1	SNA
.2		BP61-00492C	TAPE SINGLE FACE;ACRYL,ACRYL,T0.25,W50,L	0	SNA
1		BN92-31774E	ASSY BOX;Q70CH	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,W60,L110,WHT,NO SILK,9	1	SNA
.2		BN69-24804E	BOX UNIT;65Q70CH,CB,DW4,F3,L1597,W149,H9	1	SNA
1	ACC	BN92-31852S	ASSY ACCESSORY;Q70CH	1	SNA
.2		BN96-00078U	ASSY ACCESSORY MANUAL CABLE;Q60CJ	1	SNA
..3	C/SLOT	3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3		3903-001118	POWER CORD-DT;EUR,2P-F,250V,2.5A,BLK,L15	1	SA
..3		6902-003537	BAG ACCESSORY;LDPE,T0.06,W400,L280,TRP,R	1	SNA
..3		BN59-01432D	REMOCON-ECO SMART CONTROL;2023 TV,SAMSUN	1	SA
..3		BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
..3		BN68-09371B	LEAFLET-REGULATORY GUIDE;QT/UT,W/W,MOJO,	1	SNA
..3		BN68-10722C	LEAFLET-PROMOTION;QLED, UHD 8series 65"	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN68-15604A	LABEL-SECURITY;ALL,ALL,PET,T0.05,W30,L50	1	SNA
..3		BN68-15605G	MANUAL USERS;2023 4K QT/UT,XC,SPAIN,MOJO	1	SNA
..3		BN68-15687B	LEAFLET-REMOTE CONTROL;QTUT,XC,Spain,MOJ	1	SNA
1		BN95-09492C	PRODUCT LCD DP;BN95-09773A,CY-QC065FGLV1	1	SA
.2	PANEL	BN95-09773A	PRODUCT LCD-SDC;CY-QC065FGLV1H/V,Q70CH,B	1	SA
..3		BN63-00520A	GASKET-EMI;APPOLO_PAL,FABRIC,T0.13,W10,L	4	SNA
..3		BN68-05722A	LABEL-E PASS;PP,NON-COATING	1	SNA
..3		BN90-12589D	ASSY BACK LIGHT UNIT;QN900CA	1	SNA
...4		BN61-17668A	OPTICAL SHEET-COMPLEX;21Y_Q70Q60A_DBEF+P	1	SA
...4		BN61-17672A	OPTICAL SHEET-REFLECTOR;21Y_Q70Q60A_65in	1	SA
...4		BN61-18287A	OPTICAL SHEET-HIGH COLOR;21Y_Q70Q60A_65i	1	SA
...4		BN61-18480A	LGP;22Y_Q70B_65inch_LGP,MS,T2	1	SA
...4		BN96-52851C	ASSY CHASSIS FRONT P-BOTTOM;65Q60BH,PC+G	1	SNA
....5		BN60-01661A	SPACER-FABRIC;CONDUCTIVE FABRIC,L20,GRAY	2	SNA
....5		BN60-01711A	SPACER-FOAM;HR FOAM,L1000,GRAY,T0.5,W3.2	1	SNA
....5		BN64-04491A	CHASSIS-FRONT BOTTOM;65QAQ60G,PC+GF10%,V	1	SNA
....6		0103-011284	RESIN PC;LS-3104G/FW9931,White,WT0134,V-	79	SNA
...4	REAR-P	BN96-56556A	ASSY CHASSIS REAR P;65Q70CH,EGI-SECC,IOT	1	SNA
....5		0203-007086	TAPE-SINGLE FACE;PET,T0.05,W6,L50M,BLACK	1	SNA
....5		0203-007142	TAPE-DOUBLE FACE;ACRYL,T0.2,W4.5,N/A,WHI	1	SNA
....5		0204-006855	ETHANOL;CS-E-14,gravity 0.8,density 1.59	0	SNA
....5		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L100M,WHI	1	SNA
....5		BN39-02674A	LEAD CONNECTOR-BLU;65Q60A,UL21016,12P,L1	1	SA
....5	IOT	BN59-01435A	NETWORK-IOT HUB;WIC212S,57x25x6mm,IOT HU	1	SA
....5	B/WALL	BN61-11982B	BRACKET-WALL;65MU8000,CR-SPCC,NATURAL,M8	4	SNA
....5	B/WALL	BN61-13521A	BRACKET-WALL;32K5500,CR-SPCC,T1.2,NATURA	4	SNA
....5		BN61-13557J	BRACKET-WIRE;55KS7000,SW-C,T1,SILVER,ZIN	2	SA
....5		BN61-13557K	BRACKET-WIRE;55KS7000,SW-C,T1,SILVER,ZIN	2	SA
....5		BN61-13557P	BRACKET-WIRE;75QNQ8CB,SW-C,T1,SILVER,L66	6	SA
....5		BN61-17482A	HOLDER-SHEET;65QAQ60G,STS304,T0.2,Natura	3	SA
....5		BN61-17483A	HOLDER-LGP BOTTOM RIGHT;65QAQ60G,PC+ABS,	1	SNA
....6		0103-005041	RESIN PC ABS;FR3200TV/901408,Black,BK000	2	SNA
....6		0103-011880	RESIN TPEE;5202SP/5208B,Gray,GY0049,HB,G	2	SNA
....5		BN61-17484B	HOLDER-LGP TOP LEFT;65QAQ60G,PC+ABS,BK00	1	SNA
....5		BN61-17486B	HOLDER-LGP TOP RIGHT;65QAQ60G,PC+ABS,BK0	1	SNA
....5		BN61-17490A	HOLDER-LGP BOTTOM LEFT;65QAQ60G,PC+ABS,B	1	SNA
....5		BN61-17501A	BRACKET-LED PCB;65QAQ70F,Al,T1.8,NATURAL	1	SNA
....5	H/REAR	BN61-17922B	HOLDER-REAR;65QAQ60G,PC+GF10%,T3,WHITE,V	1	SNA
....5	IN/SMPS	BN63-19574A	INSULATOR-SMPS;65QAQ60G,PC,BLACK,L257,W3	1	SNA
....5	CH/REAR	BN64-04512E	CHASSIS-REAR;65Q60CJ,EGI-SECC,T0.8,NATUR	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....6		BN01-00490A	STEEL;65Q8C,EGI-SECC,0.8mm,865mm,AG	8	SNA
....5		BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
....5		BN96-52589A	ASSY LED BAR P;21Y Q70A,ALUMINUM	2	SA
..3	FRONT-P	BN96-52783B	ASSY CHASSIS FRONT P;65QAQ70F,PC+ABS+ED1	1	SNA
...4		0203-007179	TAPE-DOUBLE FACE;PU FOAM,T1.2,W3.2,N/A,B	3	SNA
...4		0204-006855	ETHANOL;CS-E-14,gravity 0.8,density 1.59	0	SNA
...4		BN63-19568B	SHEET-PROTECTION COVER;65QAQ60G,PO,T0.05	3	SNA
...4	CH/FRONT	BN64-04523B	CHASSIS-FRONT;65QAQ70F,PC+ABS+ED18%,V-0,	1	SNA
....5		0103-011774	RESIN PC ABS;NH-1210/G34312,Titan Gray,G	176	SNA
..3		BN96-54317A	ASSY OPEN CELL;SDC,65Inch,Y21 New,LSF650	1	SNA
...4		BN81-16264A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,0201-0	1	SNA
...4		BN81-16323A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,0201-0	1	SNA
...4		BN81-18787A	A/S-POLARIZER C/F;POLARIZER C/F,LJ01-122	1	SNA
...4		BN81-18846A	A/S-POLARIZER TFT;POLARIZER TFT,LJ01-115	1	SNA
...4		BN81-22832A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,LJ	1	SNA
..3	P-DECO	BN96-54674E	ASSY COVER P-DECORATION;65Q60BH,PC+ABS+E	1	SNA
...4		BN60-01656C	SPACER-CONDUCTIVE;CONDUCTIVE FABRIC/PU F	1	SNA
...4		BN60-01661A	SPACER-FABRIC;CONDUCTIVE FABRIC,L20,GRAY	2	SNA
...4		BN63-19568C	SHEET-PROTECTION COVER;65QAQ60G,PO,T0.05	0	SNA
...4		BN63-19858A	SHEET-PROTECTION COVER;Y21 Q85A,PO,T0.05	1	SNA
...4	C/DECO	BN63-20033B	COVER-DECORATION;65Q60BH,PC+ABS+ED18%,V-	1	SNA
....5		0103-012126	RESIN PC ABS;DM280P/6208CZ,Luminous Carb	80	SNA