


1. Exploded View & Part List

Exploded View

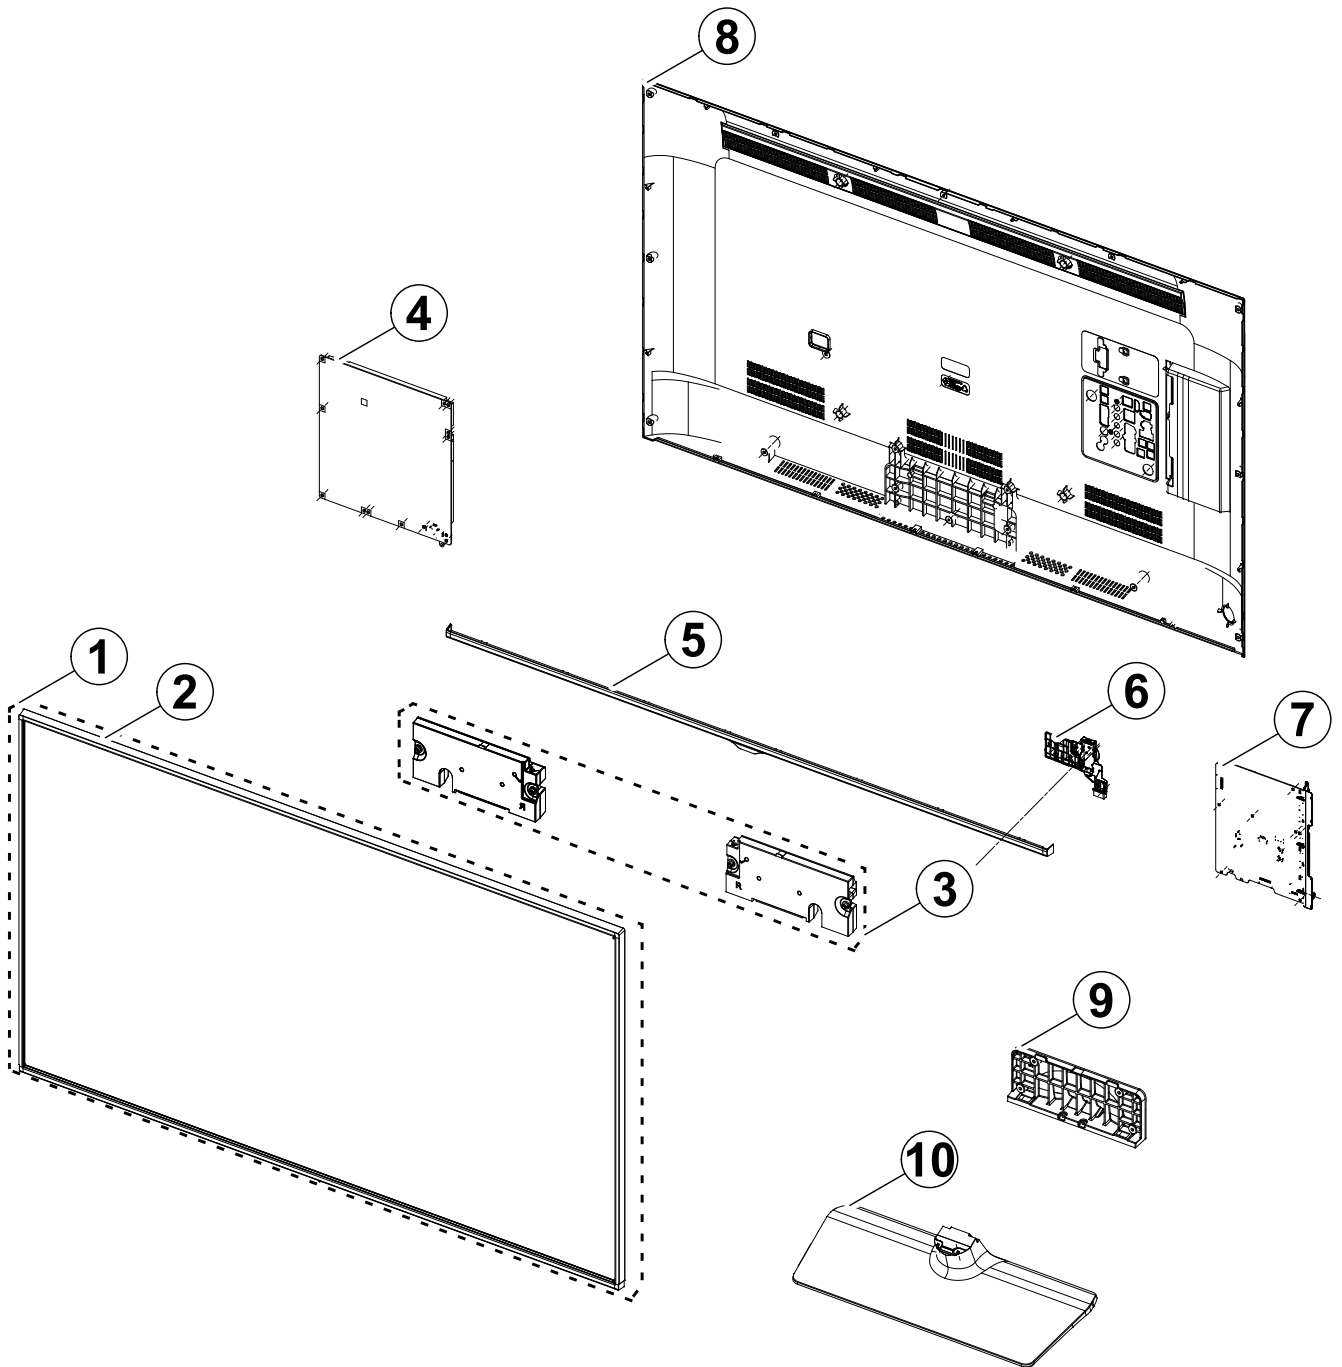

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01858B	PRODUCT LCD-SHARP; LQ400D3HD1K,CY-GH040BG	SA	1
2	3	TC01A	BN96-33983A	ASSY CHASSIS TOP P; Y14 F-LED40,PC+ABS+GF	SA	1
3	2	SP01A	BN96-30335A	ASSY SPEAKER P; 6ohm,10W,Enclosure_H5k	SA	1
4	2	P001A	BN44-00703A	DC VSS-LED TV PD BD; L48S1_ESM,L48S1_ESM,	SC	1
5	2	CD01A	BN95-01396E	ASSY DECORATION SMT; UH5500,40,LIGHT TITA	SA	1
6	2	FB01A	BN96-30902C	ASSY BOARD P-FUNCTION ASSY; UH5500,Functi	SA	1
7	2	M0014	BN94-08128A	ASSY PCB MAIN; UH5H	SA	1
8	2	R001A	BN96-31666E	ASSY COVER P-REAR; UH5570 40,EUROPE(ON TV	SA	1
9	2	SG01A	BN96-30590A	ASSY GUIDE P-STAND; UH5000/5500 40/48/50,	SA	1
10	2	SB04A	BN96-31506A	ASSY STAND P-BASE; UH5500 40",PC+ABS+G/F2	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE40H5570SSXXC (HS02)		
1	R001A	BN90-05197F	ASSY COVER REAR;UH5K	1	SNA
.2	SCREW	6001-003074	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	15	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	1	SA
.2	R001A	BN96-31666E	ASSY COVER P-REAR;UH5570 40,EUROPE(ON TV	1	SA
..3	R001	BN63-11619R	COVER-REAR;UH5500 40",PC+ABS,V1,BLK,EO(O	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	1450	SNA
..3		BN68-03518F	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,134	1	SNA
..3		BN68-05721G	LABEL-TERMINAL-SIDE;UH5.5K,PET,0.125,14.	1	SNA
1	S001A	BN90-05205C	ASSY STAND;UH5K	1	SNA
.2	SG01A	BN96-30590A	ASSY GUIDE P-STAND;UH5000/5500 40/48/50,	1	SA
..3	SG03	BN61-09997A	GUIDE-STAND;UH5000 40",PC+GF20%,V2	1	SC
...4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V2	1.5mm	210
..3		BN69-08751A	WRAP VINYL-SHRINK;STAND,PLASTIC OTHERS,P	0	SNA
..3		BN96-32380B	ASSY ACCESSORY-SCREW;LED-TV,M4,L14,B-typ	2	SNA
...4	HOLDER	BN61-09494D	HOLDER-BOLT;BH+,SWRCH18A,L14,M4,B TYPE	8	SA
...4		BN69-10588A	PACKING-BAG-SCREW;LED TV,LDPE,0.05,70,90	2	SNA
.2	SB04A	BN96-31506A	ASSY STAND P-BASE;UH5500 40",PC+ABS+G/F2	1	SA
..3	AS080	BN63-04755H	SHEET-COVER;52LC530,PE,T0.05,W275mm,200M	1	SNA
..3		BN63-11633A	COVER-STAND BASE;UH5500 40",PC+ABS+G/F20	1	SNA
...4		0103-009946	RESIN PC ABS;HM-1200,BLACK,BK0007,V1	1000	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
..3		BN67-00327D	RUBBER-FOOT;STAND,SILICON,13*13,T2,GRAY(	6	SNA
..3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART 90G,60,15,W/W	1	SNA
1		BN90-05303F	ASSY W/I;UN40F6400AFXZA	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF4~UF8,UH4~UH9 ELEC	1	SNA
.2		BN81-08368J	PART SET-MECH W/I;UH5H,U40HH*	1	SNA
1		BN91-12234G	ASSY SHIELD;UN40F6400AFXZA	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	10	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
.2	EC13	BN39-01884B	LEAD CONNECTOR;UN40H5200AF,Lead Connecto	1	SA
.2	M-F	BN39-01888B	LEAD CONNECTOR-FUNCTION;UH5500,Lead Conn	1	SA
.2	EC13	BN39-01889H	LEAD CONNECTOR;UE40H6300,Flat Connector,	1	SA
.2	P001A	BN44-00703A	DC VSS-LED TV PD BD;L48S1_ESM,L48S1_ESM,	1	SC
.2	WIFI	BN59-01174A	NETWORK-WIFI MODULE;WIDT-30Q,Internal Wi	1	SA
.2	CD01A	BN95-01396E	ASSY DECORATION SMT;UH5500,40,LIGHT TITA	1	SA
..3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	0	SNA
..3		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	0	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,over	0	SNA
...3		BN02-00353A	COATING-AFS;SSVD-39,2%,1~10 cps,1.78	2	SNA
...3	FD01	BN63-11614B	COVER-DECORATION;UH5500 40",PC+ABS+GF15%	1	SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	135	SNA
...3		BN63-13128E	SHEET-COVER;LED,PET,0.05,13,100,300g,ST-	1	SNA
...3		BN68-03920A	LABEL BOX;All Monitor,ART-PAPER 100G,WHT	1	SNA
...3		BN69-10522C	PACKING-TRAY;TRAY 40",PAPER,-,-,30,535,9	1	SNA
...3		BN69-10523D	BOX-SMT;40" SMT DECORATION,PAPER,-,-,330	1	SNA
...3		BN69-10617K	PACKING-SHEET SMT;40" INHOUSE,HDPE,PE FO	1	SNA
.2	SP01A	BN96-30335A	ASSY SPEAKER P;6ohm,10W,Enclosure_H5k	1	SA
.2	FB01A	BN96-30902C	ASSY BOARD P-FUNCTION ASSY;UH5500,Function	1	SA
...3	JOG	BN96-30902A	ASSY BOARD P-JOG SWITCH PBA;UH5000,Function	1	SNA
...3	IR	BN96-30904A	ASSY BOARD P-IR PBA;UH5500,Function Assy	1	SNA
.2	FL06	BN96-31530Y	ASSY CABLE P-FFC;UE40H5500,FFC,NH,400mm,	1	SA
1		BN91-13405B	ASSY LCM-SHARP;BN95-01858B,CY-GH040BGSV2	1	SNA
.2	PANEL	BN95-01858B	PRODUCT LCD-SHARP;LQ400D3HD1K,CY-GH040BG	1	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	2	SA
...3	SCREW	6001-003083	SCREW-MACHINE;CH,+,M3,L8,ZPC(BLK),SWRCH1	3	SA
...3		BN62-00503F	INSULATION-SOURCE PCB L;Y14 VNB 40 SHARP	1	SNA
...3		BN62-00503G	INSULATION-SOURCE PCB R;Y14 VNB 40 SHARP	1	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN90-06163A	ASSY MISC-BLU;H5000 40"	1	SNA
...4		BN61-10113A	SUPPORT-PLATE;Y14 F-LED,PC,V2,WHT/CLEAR,	8	SNA
...4		BN61-10233A	LGP-DIFFUSER PLATE;40inch Diffuser Plat	1	SNA
...4		BN63-13075A	SHEET-REFLECTOR;40inch Sharp, UXJP175,PE	1	SNA
...4		BN63-13076A	SHEET-COMPLEX;40inch Sharp, DMOP-30,PET,	1	SNA
...4		BN96-30449A	ASSY LED BAR P;40inch FHD Dire,FCPkg,6ea	5	SA
...4		BN96-30450A	ASSY LED BAR P;40inch FHD Dire,FCPkg,3ea	5	SA
...4		BN96-33979A	ASSY CHASSIS BOTTOM P;Y14 F-LED 40",EGI-	1	SNA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....5		BN02-00324A	TAPE-METAL FOIL;Y14 4K,T0.085,W25,NTR,3M	0	SNA
....5		BN02-00352B	TAPE PET-ROLL;Y12 F-LED,PET,T0.05,W30,L5	1	SNA
....5		BN02-00352D	TAPE PET-ROLL;Y12 F-LED,PET,T0.05,W20,L5	0	SNA
....5		BN61-10207A	HOLDER-WALL RIVET;Y14 F-LED 32",SWRCH10A	4	SNA
....5		BN61-11086A	HOLDER-MIDDLE U;Y14 F-LED 40" SHARP,PC+G	1	SNA
....5		BN61-11087A	HOLDER-MIDDLE D;Y14 F-LED 40" SHARP,PC+G	1	SNA
....5		BN61-11089A	HOLDER-MIDDLE LR;Y14 F-LED 40" SHARP,PC+	2	SNA
....5		BN62-00501D	INSULATION-PD BOARD;Y14 VNB 39_40_42_48	1	SNA
....5	T0073	BN63-03871A	GASKET-EMI;58P9,Fabric,2,15,11	4	SNA
....5	CC02	BN64-02801A	CHASSIS-BOTTOM;Y14 F-LED 40" SHARP,EGI-S	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN96-30417A	ASSY BOARD P-LED INTERFACE B'D;40inch FH	1	SNA
...4		BN96-33981A	ASSY FRAME P-MOLD MIDDLE;Y14 F-LED 40,PC	1	SNA
....5		BN60-00735M	SPACER-MIDDLE;Y14 VNB 32,PET,L380,NTR,T0	1	SNA
....5		BN60-00735N	SPACER-MIDDLE;Y14 VNB 40,PET,L470,NTR,T0	1	SNA
....5		BN60-00744C	SPACER-RUBBER;Y14 SF-LED VNB,SH-0140U+AT	1	SNA
....5		BN60-00815B	SPACER-PANEL (UD);14 SF-LED 40,SI,L890,G	2	SNA
....5		BN60-00815C	SPACER-PANEL (LR);14 SF-LED 40,SI,L498,G	2	SNA
....5		BN61-11084A	FRAME-MOLD MIDDLE;Y14 F-LED 40" SHARP,PC	1	SNA
..3		BN96-30081A	ASSY OPEN CELL;LQ400D3HD1K,1920*1080,40"	1	SNA
...4		BN81-08338A	AS-DRIVER IC;DRIVER IC,S6C277G3,miniLVDS	1	SNA
...4		BN81-10999A	A/S-SOURCE PCB;SOURCE PCB,DUNTK5528TPX0,	1	SNA
...4		BN81-11001A	A/S-SOURCE PCB;SOURCE PCB,DUNTK5529TPX0,	1	SNA
...4		BN81-11002A	A/S-POL-C/F;POLARIZER-C/F,PFILV1866TPXZ,	1	SNA
...4		BN81-11003A	A/S-POL-TFT;POLARIZER-TFT,PFILV1867TPXZ,	1	SNA
...4		BN81-11004A	A/S-GATE IC;GATE IC,VHINT952821-5L,272ch	1	SNA
..3	TCON	BN96-30171A	ASSY T CON P;LQ0DZC0116,40" FHD 60Hz T-c	1	SA
..3	OC-TC	BN96-30783B	ASSY CABLE P-FFC;H6000,FFC,NH,57mm l,80	2	SNA
..3	TC01A	BN96-33983A	ASSY CHASSIS TOP P;Y14 F-LED40,PC+ABS+GF	1	SA
...4		BN60-00930E	SPACER-TOP(UD);Y14 VNB 40",GASKET+PET,L8	2	SNA
...4		BN60-00930F	SPACER-TOP(LR);Y14 VNB 40",GASKET+PET,L5	2	SNA
...4		BN60-01076A	SPACER-GASKET;Y14,CONDUCTIVE FABRIC,L16,	3	SNA
...4	AS080	BN63-10945C	SHEET-COVER;Y13 SF-LED,PO-SHEET,T0.068,W	2	SNA
...4		BN63-11161B	SHEET-THERMAL;AL+SPONGE,1.5,W 11,L 45,BL	8	SNA
...4		BN63-11875A	SHEET-COVER;Y14 SF-LED,POLY*,0.068,W25,L	2	SNA
...4	FW04	BN64-02480A	WINDOW-RMC;UH5500 40",PC,V2,Violet, T25%	1	SNA
...4	AC157	BN64-02803A	CHASSIS-TOP;Y14 F-LED 40"5.5K SHARP,PC+A	1	SNA
1	M0017	BN91-14028A	ASSY CHASSIS;UH5H	1	SNA
.2	M0014	BN94-08128A	ASSY PCB MAIN;UH5H	1	SA
..3		BN61-10548A	HOLDER-SIDE AV;U5.5K,HIPS,BLK,CIS(5570)	1	SNA
...4		0103-004628	RESIN HIPS;HF-1690H,K2901,BK0020,1.5mm H	13	SNA
..3		BN62-00273B	HEAT SINK-PS;TV Echo-P,A6063,5t,BLACK,40	1	SNA
..3		BN97-07056C	ASSY SMD;UH5K,BN41-02156A	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DR01A	0402-001614	DIODE-RECTIFIER;S1G,400V,1A,DO-214AC,TP	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	2	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	3	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	2	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	3	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	9	SA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	2	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	5	SC
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-002917	FET-SILICON;AO3406,N,30V,3.6A,1.4W,SOT-2	2	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	8	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	2	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	3	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	1	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	2	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003671	IC-AUDIO AMP;NTP7414,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4		1203-006109	IC-POS.FIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4		1203-007211	IC-POS.FIXED REG.;G9915-12T45U,TO-252,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007242	IC-POS.ADJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007694	IC-DC/DC CONVERTER;SN1106041DDAR,DDA,8Z3	1	SA
...4		1203-007697	IC-DC/DC CONVERTER;LNBH26SPQR,QFN,24Z30,	1	SNA
...4		1203-007984	IC-DC/DC CONVERTER;AOZ3015PI,SO-8,8P,6.2	1	SA
...4		1203-008104	IC-POS.FIXED REG.;S-13A1D18-E8001,HSOP,	2	SNA
...4		1203-008105	IC-POS.FIXED REG.;S-13A1D33-E8001,HSOP,	1	SNA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	1	SNA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1204-003535	IC-DECODER;SEMS31T,PBGA,709P,23x23mm,PLA	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	2	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	28	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	38	SA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	38	SNA
...4		2007-000147	R-CHIP;8.2Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	37	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	14	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	4	SA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	5	SNA
...4		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	12	SNA
...4		2007-001295	R-CHIP;39ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	3	SA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	6	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	29	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	8	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
...4		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	5	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	3	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	2	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	7	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	11	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	9	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	2	SNA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	13	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	4	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	3	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	3	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	97	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	11	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	7	SNA
...4	AD480	2203-006260	C-CER,CHIP;220nF,10%,10V,X5R,TP,1005	8	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	7	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	5	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	10	SC
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	21	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	20	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	6	SNA
...4	AD480	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	24	SNA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	6	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	2	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012,0	32	SNA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	4	SNA
...4	AD480	2203-007401	C-CER,CHIP;10000nF,10%,50V,X5R,TP,3225	2	SA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	6	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	4	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4Ohm,50mA,45,	4	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	1	SA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,5050,0.055Ohm,300	1	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	3	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	4	SA
...4		2703-004868	INDUCTOR-SMD;6.8uH,20%,5050,4.0T,0.043Oh	1	SA
...4		2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	7	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	33	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001856	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	1	SA
...4		3701-001861	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	2	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003617	JACK-PHONE;14P/2C,SN,BLK,STRAIGHT,3.6PI,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4	ET01	BN40-00292B	TUNER;GTCS2X-33S/K3-FWS,GTCS2X-33S/K3-FW	1	SA
...4		BN41-02156A	PCB MAIN;X14H, EU, LED 6 Series,FR-4,4,A	1	SNA
...4		BN97-08278A	ASSY MICOM;T-MST14DEUS-1004,2014.02.27	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA
...4		BN97-08425A	ASSY MICOM-BLASTER;Blaster-Version:*,**,	1	SNA
....5		BN13-00067A	PLD;MAXQ636V-2591+T,WLP,9	1	SNA
...4		BN97-08985A	ASSY MICOM-MAIN;T-MST14DEUC-2XXX,X14H	1	SNA
....5		1107-002287	IC-EMMC;KLM4G1FEAC-C031,4GByte,BGA,153P,	1	SA
...3		BN97-08279A	ASSY DRM-KEY;H6*,EU,X14	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00115K	KEY CODE-CERTIFI;CI+,TV,X14, EU	1	SNA
1		BN92-13976C	ASSY P/MATERIAL;UH5K	1	SNA
.2		0203-001595	TAPE-OPP MASKING;OPP-2,0.075,75,800M,CLR	2	SNA
.2		6902-001956	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	2	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	0	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P,T0.	1	SNA
.2		BN69-03982P	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W120,L2	1	SNA
.2		BN69-05418L	PACKING-BAG WRAPPING;-LDPE,-,-,T0.017,5	1	SNA
.2		BN69-06640E	PACKING-TRUCK PAD;TRUCK PAD,PAPER,-,-,DW	1	SNA
.2		BN69-06641A	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1130,10	1	SNA
.2		BN69-09567A	CUSHION-SET;UH5000/5500 40",EPS,16.7g/l,	1	SNA
...3		0103-005099	RESIN EPS;BASF303,Natural,Natural	336	SNA
.2		BN69-11115A	PALLET;40" H5070,WOOD,17mm,1190,1105,141	1	SNA
1		BN92-14046H	ASSY BOX;UH5500 40	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-09812F	BOX-SET;40UH5570-SS,CB,A-01,SW3,YEL,W108	1	SNA
1		BN92-14074T	ASSY LABEL;UN40F6400AFXZA	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-06017A	LEAFLET-01,QSG;UH5500/5570,SAMSUNG,wordl	1	SNA
.2		BN68-06129A	LABEL-HIGHLIGHT POP;H70XX, H65XX, H64XX,	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA
1	ACCE1	BN92-15314D	ASSY ACCESSORY;UH5600 22	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,Polypropylene,T0	1	SNA
.2		BN96-31508T	ASSY ACCESSORY MANUAL;UH4000	1	SNA
...3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
...3		BN68-00514K	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA
...3		BN68-04972A	MANUAL FLYER-06,REGULATORY GUI;ALL,SAMSU	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN68-05944R	LEAFLET-13,FICHE;UH55Series,EU,W/P	1	SNA
..3		BN68-06595A	MANUAL USERS;UH5510,SAMSUNG,ENG/FRA/SPA/	1	SNA
.2		BN96-31515G	ASSY ACCESSORY CABLE;UH5K	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000849	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SC
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
..3	REMO2	BN59-01178B	REMOCON;TM1250A,49,3.0V,TM1250A_EUROPE(W	1	SA
..3	HOLDER	BN68-08370A	HOLDER-WIRE STAND;26UE4000 GUIDE STAND,P	1	SA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3	CAIR	BN96-31644A	ASSY CABLE P;IR BLASTER,UL1185 28AWG,2.5	1	SA