


1. UE65BU8500KXXC XC24

UE65BU8500KXXC XC24

Exploded View

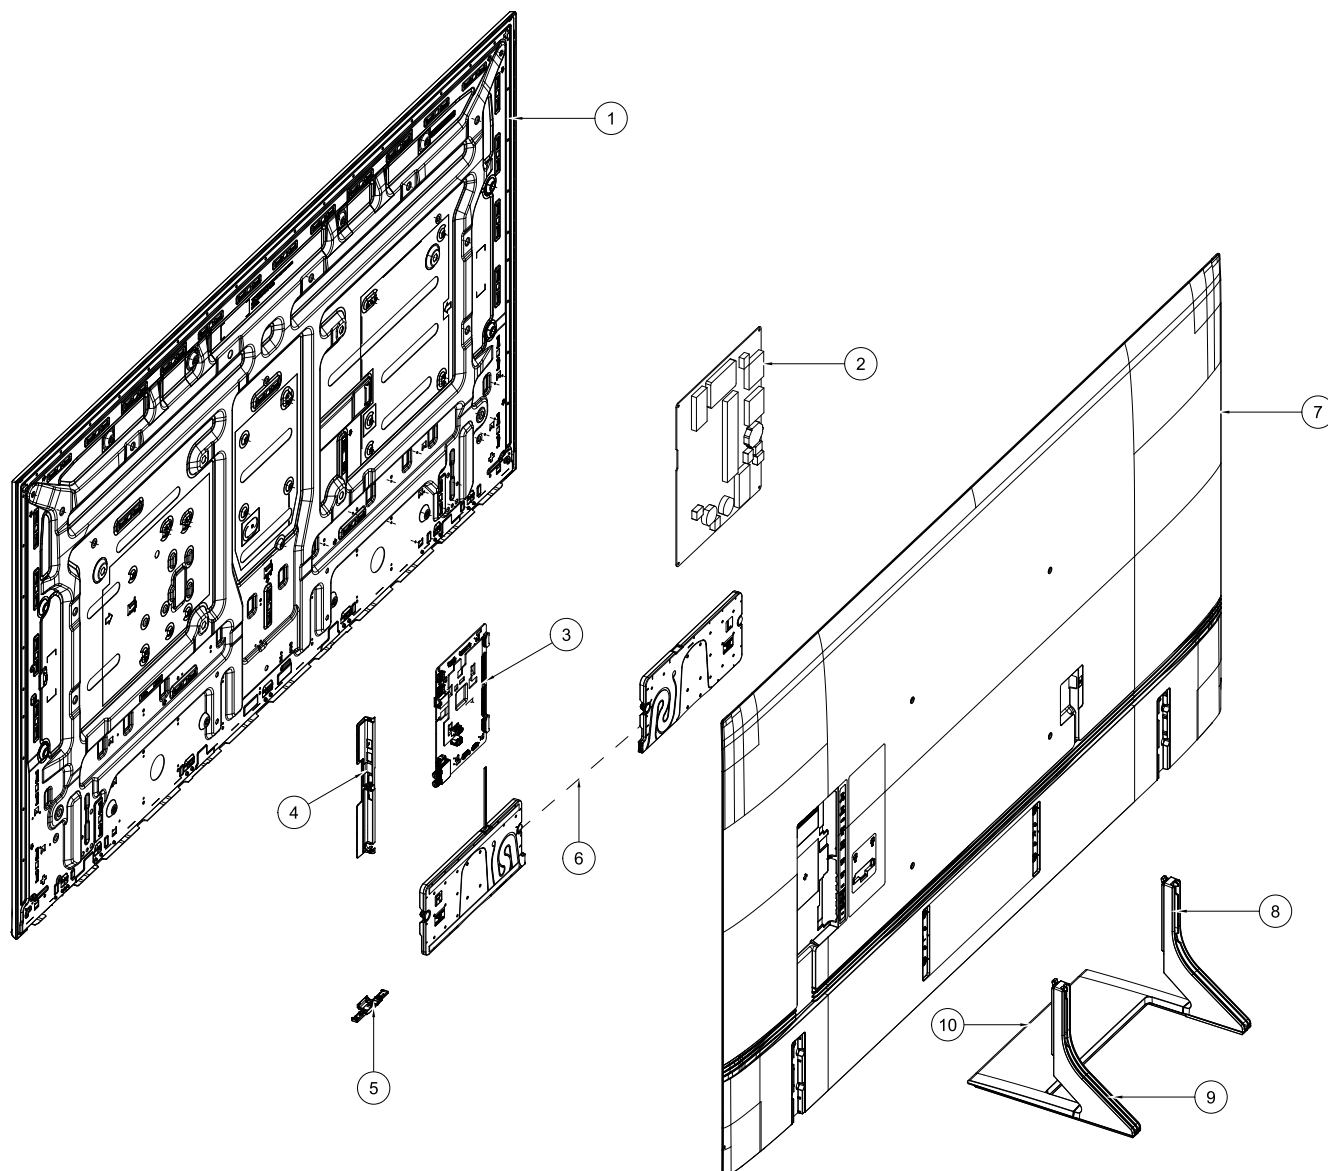

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1	PANEL	BN07-01789A	LCD-HKC; CY-SB065HGCR2V,RBSAHC2,1451.76x8	SA	1
2	2	POWER	BN44-01111E	DC VSS-PD BOARD; L65E6N_BHS,AC/DC,197.5W,	SA	1
3	2	MAIN	BN94-17382G	ASSY PCB MAIN; BU8000B	SA	1
4	2	TERMINAL	BN63-19296A	COVER-TERMINAL SIDE; 65QAQ60G,PC+ABS,V-0,	SA	1
5	2	WLAN	BN59-01407A	NETWORK-WLAN CLIENT; WCB732M,90.83x20.91x	SA	1
6	2	P-SPEAKER	BN96-52483A	ASSY SPEAKER P-FRONT; TV-SPK,65QAQ60G,2ch	SA	1
7	2	P-REAR	BN96-55422D	ASSY COVER P-REAR; 65Q60BH,PC+ABS+ED20%,V	SA	1
8	2	P-C/T_LEFT	BN96-53104A	ASSY STAND P-COVER TOP LEFT; 65AU9000A,PP	SA	1
9	2	P-C/T_RIGHT	BN96-53106D	ASSY STAND P-COVER TOP RIGHT; 65AU9000A,P	SA	1
10	2	P-C/DECO	BN96-53116C	ASSY STAND P-COVER DECORATION; 65BU8500A,	SA	1

2. Electrical Parts List

Electrical Parts List

II

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE65BU8500KXXC (XC24)		
1	PANEL	BN07-01789A	LCD-HKC;CY-SB065HGCR2V,RBSAHC2,1451.76x8	1	SA
.2		BN96-54309A	ASSY OPEN CELL;HKC,65Inch,Y21 New,PT650G	1	SA
..3		BN81-21207A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,230606	1	SNA
..3		BN81-21208A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,230607	1	SNA
..3		BN81-22076A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,26	1	SNA
..3		BN81-22077A	A/S-FPC;FPC,260505021320,PT650GT01-2,YQ,	1	SNA
..3		BN81-22078A	A/S-POLARIZER-C/F;POLARIZER-C/F,22002500	1	SNA
..3		BN81-22079A	A/S-POLARIZER-TFT;POLARIZER-TFT,22002500	1	SNA
1		BN90-12403A	ASSY W/I;BU8500A	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-20473L	A/S PART SET-MECH W/I;BU8500A,U65BA*	1	SNA
1		BN90-12404C	ASSY STAND;BU8500A	1	SNA
.2	P-C/T_LEFT	BN96-53104A	ASSY STAND P-COVER TOP LEFT;65AU9000A,PP	1	SA
..3		0203-007085	TAPE-SINGLE FACE;PET,T0.05,W20,L100M,CLE	0	SNA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+,B,M3,L8,ZPC(BLK),SW	6	SA
..3	SCREW	6003-001347	SCREW-TAPTYPE;FH,+,B,M4,L16,ZPC(WHT),SWR	2	SNA
..3		6902-003518	BAG ACCESSORY;LDPE,T0.06,W350,L300,TRP,R	2	SNA
..3	FOOT	BN61-13520D	FOOT-RUBBER;40K5500,Si,GRAY,T3	6	SNA
..3		BN61-17714A	BRACKET-STAND BOTTOM;65AU9000A,HGI,T2,NA	2	SNA
..3	S/T-LEFT	BN63-19401A	COVER-STAND TOP LEFT;65AU9000A,PP+GF40%,	1	SNA
...4		0103-011475	RESIN PP;9500G40/9379B,Black,BK0020,HB,G	580	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,ART,-,W10,L25,-,-,-,	3	SNA
..3		BN68-05603A	LABEL-E PASS;ART,W/W,90g	3	SNA
..3		BN96-49315B	ASSY ACCESSORY-SCREW;65QAQN90D,ALL,W/W,R	1	SNA
...4	SCREW	6003-001907	SCREW-TAPTYPE;BH,+,S,M4,L14,ZPC(BLK),SWR	4	SA
...4		6902-003608	BAG SCREW;LDPE,T0.06,W60,L80,TRP,RECYCLE	1	SNA
.2	P-C/T_RIGHT	BN96-53106D	ASSY STAND P-COVER TOP RIGHT;65AU9000A,P	1	SA
..3	S/T-RIGHT	BN63-19414A	COVER-STAND TOP RIGHT;65AU9000A,PP+GF40%	1	SNA
..3		BN68-05603G	LABEL-E PASS;ART,W15,L60,YELLOW	1	SNA
.2	P-C/DECO	BN96-53116C	ASSY STAND P-COVER DECORATION;65BU8500A,	1	SA
..3		6902-003800	BAG ACCESSORY;HDPE/PE FOAM,T0.015/T0.5,W	1	SNA
..3		BN63-19416A	COVER-STAND DECORATION;65AU9000A,ABS,HB,	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	160	SNA
1		BN90-12514B	ASSY COVER REAR;BU8500A	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	P-REAR	BN96-55422D	ASSY COVER P-REAR;65Q60BH,PC+ABS+ED20%,V	1	SA
..3	C/REAR	BN63-19279M	COVER-REAR;65QAQ60G,PC+ABS+ED20%,V-0,BK0	1	SNA
...4		0103-011533	RESIN PC ABS;GC-1214A/K21294,Black,BK000	4300	SNA
..3		BN68-03518W	LABEL-STICKER CI SLOT;43UNU7090P,PET,T0.	1	SNA
1	CHASSIS	BN91-23891W	ASSY CHASSIS;BU8000B	1	SNA
.2		BN46-01884B	S/W-MODEL;UBU8000_X,X22UD, BU8000B	1	SNA
.2	MAIN	BN94-17382G	ASSY PCB MAIN;BU8000B	1	SA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		BN62-00980A	HEAT SINK-PS;BU8000_MTK,A1,W110,L110,BLA	1	SNA
..3		BN97-19318V	ASSY SMD;BU8000B	1	SNA
...4		0202-001830	SOLDER-CREAM;PFM-48W LT-SH,D20~38um,96.5	6	SNA
...4		0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001779	DIODE-ZENER;MMSZ5234BT1G,5.89~6.51V,500m	2	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	2	SNA
...4		0403-001785	DIODE-ZENER;NZH5V1B,5.1V,4.94/5.2V,500mW	1	SA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	3	SNA
...4		0403-002067	DIODE-ZENER;PESD5V0U1UT,7.5V,7.0/8.2V,30	1	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	4	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	1	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	4	SA
...4		0406-001568	DIODE-TVS;PESD5V0V1BL,5.8/6.8/7.8V,45W,S	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	3	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,6V,9V,0.2MAV,0.7VPA,0	1	SA
...4		0407-000112	DIODE-SWITCHING;BAV70,70V,200mA,SOT-23,T	1	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	8	SC
...4		0501-000462	TR-SMALL SIGNAL;MMBT2907A,PNP,350mW,SOT-	1	SA
...4		0505-001089	FET-SILICON;AO3409L,P,-30V,-2.6A,0.097/0	2	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	1	SA
...4		0505-003391	FET-SILICON;AOD2922,N,100V,8A,140Mohm,18	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	3	SA
...4		0505-003752	FET-SILICON;AONR21321,P,30V,50A,0.035ohm	1	SNA
...4		0801-003408	IC-CMOS LOGIC;74AUP1G32GW,2 input OR Gat	1	SNA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		1103-001584	IC-EEPROM;M24512-DFMN6TP,512Kbit,64K x 8	1	SNA
...4		1201-004368	IC-OP AMP;LV358G-S08-R,SOP-8,8P,TP,3.95x	1	SNA
...4		1201-004380	IC-AUDIO AMP;WA20-6829B,TP,6x6x0.9mm,-25	1	SNA
...4		1203-008917	IC-DC/DC CONVERTER;G5334CQT1U,QFN4,23P,4	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-009590	IC-VOL. DETECTOR;G623AF11U,8P,TP,TP,4.9x	1	SNA
...4		1203-009643	IC-POS1.ADJUST REG.;ET5A0ADJY2B,6P,DFN6,	2	SNA
...4		1203-009649	IC-DC/DC CONVERTER;VPMS3BRT,72P,QFN,TP,8	1	SNA
...4		1203-009729	IC-DC/DC CONVERTER;JW5357M,6P,SOT23-6,TP	3	SA
...4		1204-003847	IC-DECODER;SDP22405,TP,22.7x22.7x1.54mm,	1	SA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	3	SNA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1MWC,TP,1.6x	1	SNA
...4		1405-001232	VARISTOR;6.4V,5.6VDC,30A,1608,TP,19V,200	1	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	9	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	1	SA
...4		1405-001452	VARISTOR;15V,12VDC,8A,1608,TP,46V,18pF	6	SA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608,T0.45	3	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005,T0.35	13	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005,T0.35	38	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005,T0.35,Gen	2	SA
...4		2007-000160	R-CHIP;68Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	13	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-000442	R-CHIP;180Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000501	R-CHIP;2.2ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	SA
...4		2007-000637	R-CHIP;270Kohm,5%,1/10W,TP,1608	1	SNA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608,T0.45	1	SA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	6	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-000946	R-CHIP;47ohm,1%,1/10W,TP,1608	4	SA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001058	R-CHIP;6.2ohm,1%,1/10W,TP,1608	4	SNA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005,T0.35	20	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	1	SA
...4		2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005,T0.35	13	SNA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-003010	R-CHIP;20ohm,5%,1/16W,TP,1005	4	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.35,-	6	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005,T0.35	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007133	R-CHIP;300ohm,1%,1/16W,TP,1005	1	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	6	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005,T0.35	7	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	11	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	26	SNA
...4		2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005,T0.35	24	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	6	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	6	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005,T0.35	16	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	24	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005,T0.35	6	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	2	SA
...4		2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007992	R-CHIP;1ohm,1%,1/10W,TP,1608	2	SA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-008134	R-CHIP;12.4Kohm,1%,1/16W,TP,1005	1	SC
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-008269	R-CHIP;51Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-008779	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35,Gener	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	7	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	5	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4	AD480	2203-000278	C-CER,CHIP;10pF,0.5pF,50V,C0G,TP,1005,-5	1	SA
...4	AD480	2203-000359	C-CER,CHIP;150pF,5%,50V,C0G,TP,1005,T0.5	5	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-000386	C-CER,CHIP;15pF,5%,50V,C0G,TP,1005,T0.5,	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005,T0.5,	6	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005,T0.	1	SA
...4	AD480	2203-000585	C-CER,CHIP;220pF,10%,50V,X7R,TP,1005,T0.	2	SA
...4	AD480	2203-000627	C-CER,CHIP;22pF,5%,50V,C0G,TP,1005,T0.5,	5	SNA
...4	AD480	2203-000812	C-CER,CHIP;33pF,5%,50V,C0G,TP,1005,-55to	2	SA
...4	AD480	2203-000940	C-CER,CHIP;470pF,10%,50V,X7R,TP,1005,T0.	1	SA
...4	AD480	2203-001640	C-CER,CHIP;390pF,10%,50V,X7R,TP,1608,-55	4	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005,-55t	9	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	6	SA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005,T0.	44	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005,T0.5	3	SNA
...4	AD480	2203-006257	C-CER,CHIP;470nF,10%,6.3V,X5R,TP,1005,T0	1	SNA
...4	AD480	2203-006460	C-CER,CHIP;2.2uF,10%,16V,X5R,TP,1608,-55	2	SA
...4	AD480	2203-006562	C-CER,CHIP;1uF,10%,10V,X5R,TP,1005,T0.5,	11	SNA
...4	AD480	2203-006698	C-CER,CHIP;1uF,10%,25V,X7R,TP,1608,T0.8,	5	SNA
...4	AD480	2203-006838	C-CER,CHIP;2.2uF,10%,6.3V,X5R,TP,1005,T0	3	SA
...4	AD480	2203-006960	C-CER,CHIP;1uF,10%,50V,X7R,TP,2012,-55to	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10uF,10%,16V,X5R,TP,2012,T1.2	5	SNA
...4	AD480	2203-007230	C-CER,CHIP;47uF,20%,6.3V,X5R,TP,2012,T1.	2	SA
...4	AD480	2203-007240	C-CER,CHIP;22uF,20%,6.3V,X5R,TP,1608,T0.	36	SA
...4	AD480	2203-007269	C-CER,CHIP;22uF,20%,10V,X5R,TP,2012,T0.8	15	SA
...4	AD480	2203-007271	C-CER,CHIP;2.2uF,10%,10V,X5R,TP,1005,T0.	2	SNA
...4	AD480	2203-007306	C-CER,CHIP;10uF,10%,25V,X5R,TP,2012,T1.2	16	SNA
...4	AD480	2203-007393	C-CER,CHIP;4.7uF,10%,10V,X5R,TP,1005,T0.	6	SNA
...4	AD480	2203-007423	C-CER,CHIP;10uF,10%,35V,X7R,TP,3216,-55t	4	SA
...4	AD480	2203-007425	C-CER,CHIP;2.2uF,10%,25V,X5R,TP,1608,T0.	1	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	21	SA
...4	AD480	2203-008315	C-CER,CHIP;22uF,20%,25V,X5R,TP,2012,T1.2	8	SA
...4	AD480	2203-008412	C-CER,CHIP;4.7uF,10%,50V,X5R,TP,2012,T1.	1	SNA
...4	AD480	2203-009733	C-CER,CHIP;10uF,20%,10V,X5R,TP,1005,T0.7	18	SA
...4		2402-001268	C-AL,SMD;100uF,20%,25V,WT,TP,8x6.3mm	1	SA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,T0.8,1.35Ohm	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1Ohm,200m	3	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	3	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	4	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2703-005192	INDUCTOR-SMD;4.7uH,20%,6060,T4.5,0.036Oh	1	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,T4.5,0.03Ohm	1	SA
...4		2703-005715	INDUCTOR-SMD;820nH,20%,11x10mm,T3.8,0.00	1	SNA
...4		2703-005780	INDUCTOR-SMD;10uH,20%,2012,T1.25,0.91Ohm	2	SNA
...4		2703-005889	INDUCTOR-SMD;10uH,20%,7366,T3.8,0.072Ohm	1	SNA
...4		2801-004774	CRYSTAL-SMD;24MHz,30ppm,14pF,30ohm,TP	1	SA
...4		3301-001364	BEAD-SMD;1000ohm/100Mhz,1.6x0.8mm,TP,139	4	SNA
...4		3301-002039	BEAD-SMD;26ohm/100Mhz,1.6X0.8mm,TP,7mohm	9	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	1	SNA
...4		3701-001856	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	1	SA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	2	SA
...4		3707-001133	CONNECTOR-OPTICAL;STRAIGHT,SPDIF,2.5PI	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	1	SA
...4		3708-003355	CONNECTOR-FPC/FFC/PIC;TP,SMD-A,24P,0.5mm	1	SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4		3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4		3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,ANG	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	2	SA
...4		6302-001376	GASKET-SMD;SMT Gasket,Si,T6,W4.5,L2.5,SI	3	SNA
...4		BN40-00341A	TUNER-DTV AIR CABLE;GTTH-21A11,DVB-TC,38	1	SA
...4		BN41-02991A	PCB-MAIN;BU8000,FR-4,4L,T1.6,144.5x214mm	1	SNA
...4		BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SA
...4		BN97-19935A	ASSY MICOM;THGBMJG6C1LBAIL,T-X22UDDEUC,1	1	SNA
....5		1107-002688	IC-EMMC;THGBMJG6C1LBAIL,8Gbit,64Gbx1,BGA	1	SNA
...4		BN97-19938A	ASSY MICOM;X22UD BU8,1107-002768,(IC501_	1	SNA
....5		1107-002690	IC-NOR FLASH;EN25Q40B-104HIP2X,4Mbit,SOP	1	SNA
...4		BN97-20348A	ASSY MICOM;X22UD BU8,1107-002768,ZIC503_	1	SNA
....5		BN46-02062A	S/W MICOM;FACTORY_PEQ,X22UD,FACTORY_PEQ	1	SNA
...3		BN97-19933A	ASSY DRM;X22UD BU8,DVB,NAGSAM,HDCP,MAC,C	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-01979A	KEY CODE;X22UD_BU8,Nagra CSC Data,T-X22U	1	SNA
...4		BN46-01980A	KEY CODE;X22UD_BU8,C1 PLUS,CIP,Samsung-i	1	SNA
...4		BN46-01981A	KEY CODE;X22UD_BU8,C1 PLUS,ECP,Samsung-i	1	SNA
...4		BN46-01984A	KEY CODE;X22UD_BU8,HDMI,HDCP_X22UD	1	SNA
...3		BN97-19939A	ASSY MICOM;COMMON,X22UD BU8	1	SNA
...4		BN46-01983A	S/W MICOM;COMMON,X22UD,BU8000	1	SNA
1		BN91-23894Q	ASSY SHIELD;BU8000B	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L100M,WHI	0	SNA
.2		BN39-02217F	LEAD CONNECTOR-POWER;70KU6000,UL21016,12	1	SA
.2	POWER	BN44-01111E	DC VSS-PD BOARD;L65E6N_BHS,AC/DC,197.5W,	1	SA
.2	WLAN	BN59-01407A	NETWORK-WLAN CLIENT;WCB732M,90.83x20.91x	1	SA
.2	TERMINAL	BN63-19296A	COVER-TERMINAL SIDE;65QAQ60G,PC+ABS,V-0,	1	SA
..3		0103-005041	RESIN PC ABS;FR3200TV/901408,Black,BK000	17	SNA
.2	P-SPEAKER	BN96-52483A	ASSY SPEAKER P-FRONT;TV-SPK,65QAQ60G,2ch	1	SA
.2		BN96-52744A	FFC;65Q60A,Fold,L650,96P	1	SA
.2		BN96-54739A	FFC;QN65Q60BAFXZA,Fold,L600,24P,Locking	1	SA
1		BN92-30939D	ASSY LABEL;BU8500A	1	SNA
.2		BN68-06708G	LABEL-RATING;ALL,WW,PP,T0.1,W93,L73,Dark	1	SNA
.2		BN68-11432A	LABEL-ENERGY;EU,PP,T0.1,W96,L192,INBOX	1	SNA
.2		BN68-11433A	LABEL-ENERGY;EU,ART,T0.1,W96,L192,BOX	1	SNA
.2		BN68-15970G	LEAFLET-QUICK SETUP GUIDE;Q70B (55-85),O	1	SNA
.2		BP61-00492C	TAPE SINGLE FACE;ACRYL,ACRYL,T0.25,W50,L	0	SNA
1		BN92-30942Y	ASSY BOX;BU8500A	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,W60,L110,WHT,NO SILK,9	1	SNA
.2		BN69-23528C	BOX UNIT-OUT;65BU8500A,CB,DW4,F3,L1597,W	1	SNA
1		BN92-30943R	ASSY P/MATERIAL;BU8500A	1	SNA
.2		6902-003990	BAG AIR;LDPE,T0.2,W850,L1800,TRP,RECYCLE	0	SNA
.2		6902-004038	BAG ROLL;HDPE/PE FOAM,All 65"Series,T0.0	2	SNA
.2		6922-000421	BAND;PP,T0.8,W18,L2300,TRP,Recycled PIR_	5	SNA
.2		6932-000008	WRAP;LDPE,T0.017,W750,Transparent	3	SNA
.2		BN02-00319B	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	0	SNA
.2		BN69-03982V	PACKING ANGLE;ALL,PAPER,T3,W2000,L60,YEL	0	SNA
.2		BN69-21257W	PALLET-WOODEN;65AU8K_9K*,WOOD,W1150,L163	0	SNA
.2		BN69-21717G	PAD PACKING;55" except Q8/Q9"series 65",	0	SNA
.2		BN69-21920C	CUSHION-SET SIDE;65Q70BG,EPS,16.7g/l,WHI	2	SNA
..3		0103-012058	RESIN EPS;RE-710E_P/NATURAL,Natural,NC00	8	SNA
.2		BN69-22276D	PAD-SHEET;65QAQ60G,PET,T3.2,W50,L809,WHI	0	SNA
.2		BN69-23239A	CUSHION-SET FRONT;65Q60BH,EPS,16.7g/l,WH	1	SNA
..3		0103-005099	RESIN EPS;BASF303/NP,Natural,Natural,HB	285	SNA
.2		BN92-00460H	ASSY PACKING-CUSHION-SET + IN-BOX;65BU85	1	SNA
..3		BN69-21909C	CUSHION-SET;65Q70BG,EPS,16.7g/l,WHITE,Re	1	SNA
...4		0103-005099	RESIN EPS;BASF303/NP,Natural,Natural,HB	858	SNA
...4		0103-012058	RESIN EPS;RE-710E_P/NATURAL,Natural,NC00	45	SNA
..3		BN69-22147A	BOX UNIT-IN;65AU8000B,CB,DW1,C1,L1870,W4	1	SNA
1	ACC	BN92-31178Z	ASSY ACCESSORY;BU8500A	1	SNA
.2		BN96-52538R	ASSY ACCESSORY MANUAL CABLE;BU8500A	1	SNA
..3	C/SLOT	3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		3903-001118	POWER CORD-DT;EUR,2P-F,250V,2.5A,BLK,L15	1	SA
..3		6902-003537	BAG ACCESSORY;LDPE,T0.06,W400,L280,TRPR	1	SNA
..3		BN59-01386B	REMOCON-ECO SMART CONTROL;2022 TV,SAMSUN	1	SA
..3		BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
..3		BN68-09371B	LEAFLET-REGULATORY GUIDE;QT/UT,W/W,MOJO,	1	SNA
..3		BN68-10722C	LEAFLET-PROMOTION;QLED, UHD 8series 65"	1	SNA
..3		BN68-13657B	MANUAL USERS;4K(BU8000-QN90B),XC,SPAIN,M	1	SNA
..3		BN68-13842J	LEAFLET-REMOTE CONTROL;BU8000 BU8500 32L	1	SNA