


1. Exploded View & Part List

Exploded View

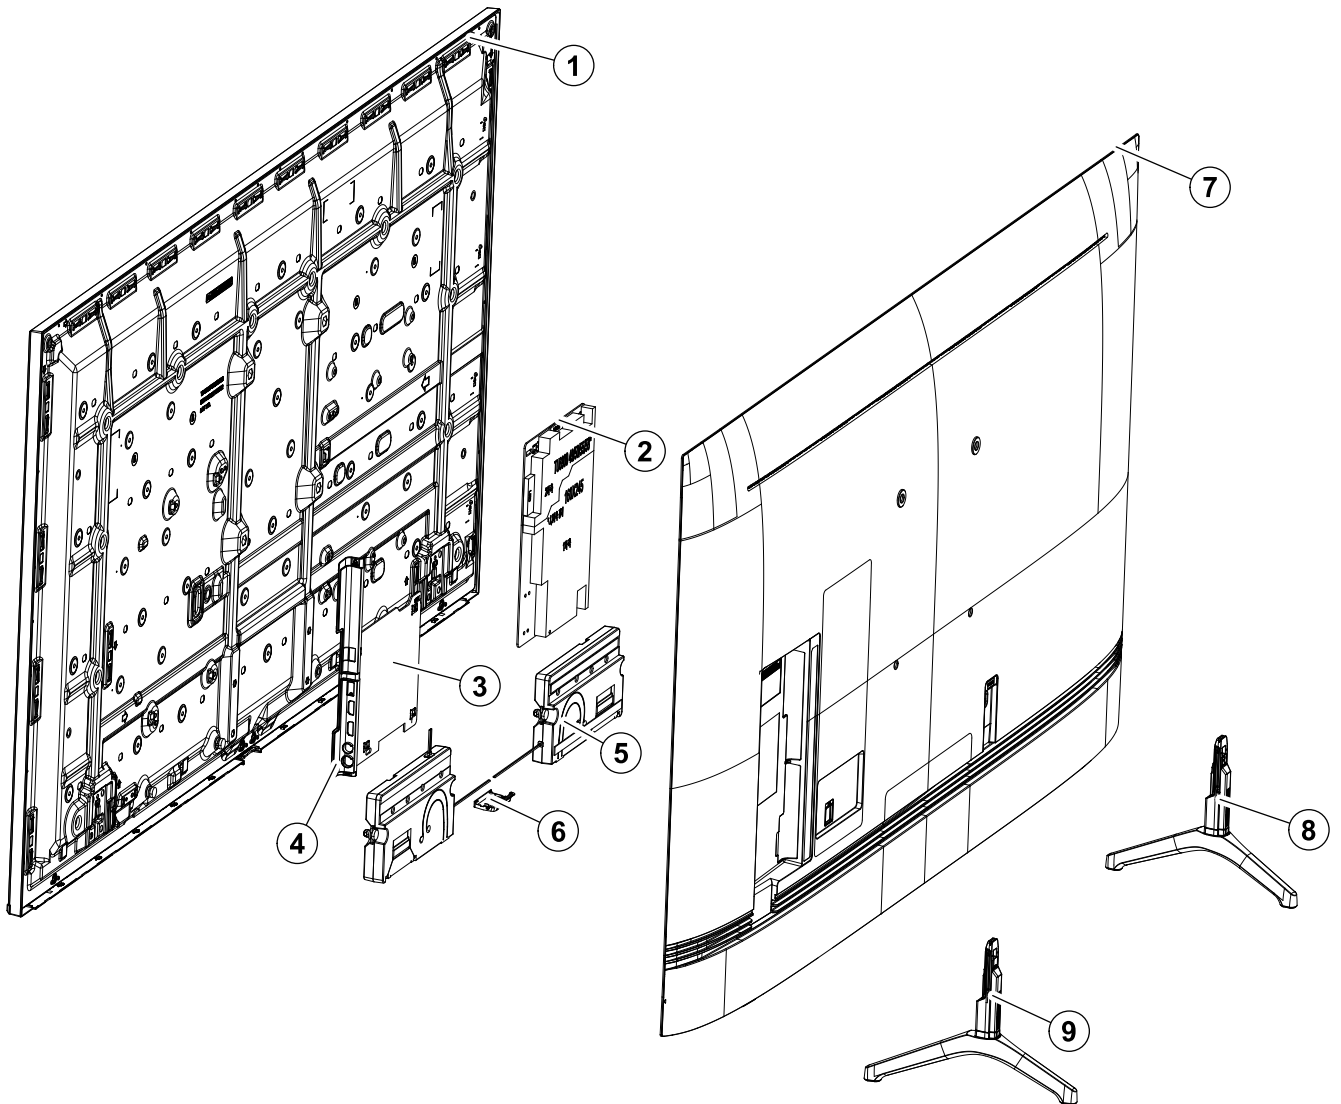

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-06386A	PRODUCT LCD-SDC; CY-GT065HGLV1V/H,TU7000,	SA	1
2	2		BN44-01055A	DC VSS-PD BOARD; L65S6N_TDY,AC/DC,192.5W,	SA	1
3	2	M0014	BN94-15312U	ASSY PCB MAIN; UTU7000K	SA	1
4	3	TERMINAL	LBN63-18718D	COVER-TERMINAL SIDE; 65QTQ60F,PC+ABS,V-0,	SA	1
5	2		BN96-49998C	ASSY SPEAKER P-FRONT; TV-SPK,65UTU7000,6o	SA	1
6	2	WLAN	BN59-01341B	NETWORK-WLAN CLIENT; WCT734M,44.17x31.99x	SA	1
7	2	R001A	BN96-50807F	ASSY COVER P-REAR; 65UTU7000J,PC+ABS+ED20	SA	1
8	2		BN96-50863B	ASSY STAND P-COVER TOP RIGHT; 65UTU8000H,	SA	1
9	2		BN96-50868B	ASSY STAND P-COVER TOP LEFT; 65UTU8000H,P	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE65TU7172UXXH (FF02)		
1		BN90-11425A	ASSY W/I;UTU7000K	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-17118M	A/S PART SET-MECH W/I;UTU7000K,U65TK*	1	SNA
1	S001A	BN90-11426D	ASSY STAND;UTU7000K	1	SNA
.2		BN96-50863B	ASSY STAND P-COVER TOP RIGHT;65UTU8000H,	1	SA
..3		6902-003299	BAG ACCESSORY;LDPE,T0.06,W350,L280,TRP,R	2	SNA
..3		BN63-18573B	COVER-STAND TOP RIGHT;65UTU8000H,PP+GF40	1	SNA
.2		BN96-50868B	ASSY STAND P-COVER TOP LEFT;65UTU8000H,P	1	SA
..3		0203-007085	TAPE-SINGLE FACE;PET,T0.05,W20,L100M,CLE	0	SNA
..3	RF01	BN61-13520D	FOOT-RUBBER;40K5500,RUBBER,GRAY,W5,L10,T	4	SNA
..3		BN63-18577B	COVER-STAND TOP LEFT;65UTU8000H,PP+GF40%	1	SNA
...4		0103-011648	RESIN PP;9500G40/9378C,Titan Gray,GY0357	276	SNA
..3		BN96-49093C	ASSY STAND P-HOLDER CABLE;65QRQ60T,ABS,B	1	SNA
...4		6902-003068	BAG PE;LDPE,T0.05,W70,L80,TRP,RECYCLE,Ho	1	SNA
...4		BN61-16080A	HOLDER-STAND CABLE;65QRQ60T,ABS,BK0007,H	2	SNA
....5		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	8	SNA
1	R001A	BN90-11427C	ASSY COVER REAR;UTU7000K	1	SNA
.2	R001A	BN96-50807F	ASSY COVER P-REAR;65UTU7000J,PC+ABS+ED20	1	SA
..3	R001	BN63-18467B	COVER-REAR;65UTU7000K,PC+ABS+ED20%,V-1,B	1	SNA
...4		0103-010818	RESIN PC ABS;CM20G/BK00749,BLACK,BK0007,	4426	SNA
..3		BN63-19004A	INSULATOR-SOURCE PCB;65UTU7000K,PC,BLACK	2	SNA
..3		BN64-04336C	INLAY-TERMINAL SIDE;65UTU7000K,PET,T0.12	1	SNA
..3		BN68-03518W	LABEL-STICKER CI SLOT;43UNU7090P,PET,T0.	1	SNA
1		BN91-00090R	ASSY SHIELD;UTU7000K	1	SNA
.2		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	0	SNA
.2		BN39-02601A	LEAD CONNECTOR-SUB ASSY;UL21451,20P,L475	1	SA
.2		BN39-02604A	LEAD CONNECTOR-POWER;UL21016,12P,L700,BL	1	SA
.2		BN44-01055A	DC VSS-PD BOARD;L65S6N_TDY,AC/DC,192.5W,	1	SA
.2	WLAN	BN59-01341B	NETWORK-WLAN CLIENT;WCT734M,44.17x31.99x	1	SA
.2		BN96-39820H	FFC CABLE;65/75NU8000,Fold,L500,96P,-	1	SA
.2		BN96-39903C	FFC CABLE;65/75NU8000,Fold,L650,96P,-	1	SA
.2		BN96-49998C	ASSY SPEAKER P-FRONT;TV-SPK,65UTU7000,6o	1	SA
1	M0017	BN91-21825D	ASSY CHASSIS;UTU7000K	1	SNA
.2	M0014	BN94-15312U	ASSY PCB MAIN;UTU7000K	1	SA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		BN62-00898A	HEAT SINK-PS;UN65TU7000,A1050,W100,L120,	1	SNA
..3	TERMINAL	BN63-18718D	COVER-TERMINAL SIDE;65QTQ60F,PC+ABS,V-0,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0103-005041	RESIN PC ABS;FR3200TV/901408,Black,BK000	17	SNA
...3		BN97-16731A	ASSY MICOM;65A6AUAGT,65 SDC TU7	1	SNA
...4		BN46-01191A	S/W MICOM;65A6AUAGT,KANT-SU2 Built-in,TU	1	SNA
...3		BN97-16743S	ASSY SMD;UTU7000K	1	SNA
...4		0202-001976	SOLDER-CREAM;LST-309M-K21,D20~38um,96.5S	3	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001779	DIODE-ZENER;MMSZ5234BT1G,5.89~6.51V,500m	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	2	SNA
...4		0403-001785	DIODE-ZENER;NZH5V1B,4.94~5.2V,500mW,SOD-	3	SA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	1	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	3	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	3	SA
...4		0404-001976	DIODE-SCHOTTKY;SV540,40V,5000mA,TO-277,T	1	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	4	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2V,24.5V,5MAV,30	1	SNA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	1	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,6V,9V,0.2MAV,0.7VPA,0	1	SA
...4		0406-001786	DIODE-TVS;PJEC5V0V6TM,5V,7V,8V,0.1MAV,9V	1	SA
...4		0406-001820	DIODE-TVS;AZ1023-04F,4.5V,6V,7.5V,0.5MAV	4	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	5	SC
...4		0505-001089	FET-SILICON;AO3409L,P,-30V,-2.6A,0.097/0	2	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	1	SA
...4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	1	SA
...4		0505-003391	FET-SILICON;AOD2922,N,100V,8A,140Mohm,18	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	4	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	1	SA
...4		0505-003752	FET-SILICON;AONR21321,P,30V,50A,0.035ohm	1	SNA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		1001-001545	IC-ANALOG MULTIPLEX;TS3USB221ERSER,R-PQF	1	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,x8,SOP	1	SA
...4		1105-002853	IC-DDR3 SDRAM;K4B4G1646E-BCNB,DDR3 2133,	2	SA
...4		1105-002996	IC-DDR3 SDRAM;K4B2G1646F-BCNB,DDR3,2Gbit	2	SA
...4		1201-004117	IC-AUDIO AMP;TAS5749M,QFP,48P,7x7x1mm,DU	1	SA
...4		1201-004258	IC-OP AMP;TLV9062,SOT23-8,TP,8P,DUAL,PLA	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-008777	IC-DC/DC CONVERTER;TPS563201,SOT-23,6,1.	2	SA
...4		1203-008918	IC-DC/DC CONVERTER;TPS65235,WQFN,20P,3x3	1	SA
...4		1203-009067	IC-DC/DC CONVERTER;TPS564201,SOT-23,6P,3	1	SA
...4		1203-009186	IC-POS.IADJUST REG.;TLV759P01PDRVR,TP,6P	3	SA
...4		1203-009188	IC-VOL. DETECTOR;G623F11U,TP,8P,4.9x6x1.	1	SA
...4		1203-009371	IC-DC/DC CONVERTER;VPMS2GMB,QFN,72P,8x8x	1	SA
...4		1203-009377	IC-DC/DC CONVERTER;TPS56C230,VQFN,20P,3x	1	SA
...4		1204-003797	IC-DECODER;SDP19405,HSBGA,754P,27x27x2.1	1	SA
...4		1205-004692	IC-SWITCH;TPS2069CDBVR,SOT-23,5P,2.9x2.8	2	SA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1MWC,TP,1.6x	1	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	12	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1608,TP,25V,500pF	4	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	2	SA
...4		1405-001452	VARISTOR;15V,12VDC,8A,1608,TP,46V,18pF	4	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608,T0.45	17	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	8	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005,T0.35	19	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005,T0.35	42	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	39	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000475	R-CHIP;1Mohm,1%,1/10W,TP,1608	1	SA
...4		2007-000637	R-CHIP;270Kohm,5%,1/10W,TP,1608	1	SNA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608,T0.45	1	SA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	4	SA
...4		2007-000879	R-CHIP;4.7ohm,1%,1/10W,TP,1608	4	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005,T0.35	4	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005,T0.35	14	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005,T0.35	6	SNA
...4		2007-002437	R-CHIP;2ohm,5%,1/10W,TP,1608	1	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	17	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-003010	R-CHIP;20ohm,5%,1/16W,TP,1005	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.35,-	13	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	7	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005,T0.35	8	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	7	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	43	SNA
...4		2007-007231	R-CHIP;110Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007305	R-CHIP;120ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	6	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	10	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005,T0.35	29	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005,T0.35	5	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	1	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005,T0.35	6	SA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-008672	R-CHIP;47ohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	3	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	3	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	6	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4		2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,TP,1.0x1.0	6	SA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005,T0.5	4	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,T0.	4	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005,T0.5	6	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005,T0.	2	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005,T0	2	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005,T0	1	SA
...4	AD480	2203-001153	C-CER,CHIP;0.068nF,5%,50V,C0G,TP,1005,T0	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	10	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	6	SA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,T0.	2	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005,T0.	58	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005,T0.5	7	SNA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005,T0	5	SNA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	7	SA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005,T	4	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005,T0	16	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	1	SA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,T	12	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	34	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	7	SA
...4	AD480	2203-007271	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1005,T0	5	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,T	22	SNA
...4	AD480	2203-007393	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1005,T0	2	SNA
...4	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	4	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	20	SA
...4	AD480	2203-007795	C-CER,CHIP;10000nF,20%,10V,X5R,TP,1005,T	25	SA
...4	AD480	2203-007809	C-CER,CHIP;22nF,10%,50V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	14	SA
...4	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,T1	1	SNA
...4		2402-001268	C-AL,SMD;100uF,20%,25V,WT,TP,8x6.3mm	1	SA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,T0.8,1.35Ohm	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1Ohm,200m	7	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	5	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	4	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,T4.5,0.024Oh	3	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10.7x10mm,T3.8,0.0	1	SA
...4		2703-005715	INDUCTOR-SMD;820nH,20%,11x10mm,T3.8,0.00	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2703-005780	INDUCTOR-SMD;10uH,20%,2012,T1.25,0.91Ohm	2	SNA
...4		2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50Oh	1	SA
...4		3301-001364	BEAD-SMD;1000ohm/100Mhz 1000ohm/100Mhz,1	4	SNA
...4		3301-002039	BEAD-SMD;26ohm/100Mhz 26ohm/100Mhz,1.6x0	17	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	3	SA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	2	SA
...4		3707-001123	CONNECTOR-OPTICAL;ANGLE,SPDIF,2.5PI	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008098	HEADER-BOARD TO CABLE;BOX,20P,1R,1.25mm,	1	SNA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,ANG	1	SA
...4		3711-009106	CONNECTOR-HEADER;BOX,20P,2R,2mm,ANGLE,SN	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C,Y,STRAIGHT,NONE,AU,1P	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	1	SA
...4		6302-001376	GASKET-SMD;SMT Gasket,Si,T6,W4.5,L2.5,SI	5	SNA
...4		BN40-00331B	TUNER-DTV AIR CABLE SAT;GT2S2-7B21,DVB-T	1	SA
...4		BN41-02751A	PCB-MAIN;TU7000,FR-4,4L,T1.2,1,193x168mm	1	SNA
...4	CB07	BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SNA
...4		BN97-16718A	ASSY MICOM;TCON F/W,KANT-SU2 Built-in,11	1	SNA
....5		1107-002689	IC-NOR FLASH;EN25Q80C-104HIP2A,8Mbit,SOP	1	SNA
....5		BN46-01223A	S/W MICOM;KANT-SU2 Built-in,TCON F/W	1	SNA
...4		BN97-16719A	ASSY MICOM;KU2MICOM_INTV,UTU7000K,1107-0	1	SNA
....5		1107-002690	IC-NOR FLASH;EN25Q40B-104HIP2X,4Mbit,SOP	1	SNA
...4		BN97-16721A	ASSY MICOM;T-KTSU2DEUC,ASSY MICOM_MAIN,U	1	SNA
....5		1107-002623	IC-EMMC;KLM4G1FETE-B041,4Gbyte,BGA,153P,	1	SA
....5		BN46-01245A	S/W MICOM;Factory_PEQ Kant-SU2,Kant-SU2,	1	SNA
....5		BN46-01247A	S/W MICOM;T-KTSU2DEUC,KLM4G1FETE,Kant-SU	1	SNA
...3		BN97-16777A	ASSY DRM;KANT-SU2 Built-in,DVB,Nagsam, M	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-01153A	KEY CODE;KANT-SU2,Nagra CSC Data,T-KTSU2	1	SNA
...4		BN46-01155A	KEY CODE;KANT-SU2,CI PLUS,Samsung-iDTV-2	1	SNA
1		BN92-27086S	ASSY P/MATERIAL;UTU7000K	1	SNA
.2		6902-003081	BAG ROLL;HDPE/PE FOAM,T0.015/T0.5,W1600,	2	SNA
.2		6922-000013	BAND;PP,T0.8,W18,L2300 M,TRP	5	SNA
.2		6932-000004	WRAP;T0.023,W750,L1000m,non stretched fi	4	SNA
.2		BN02-00319B	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	2	SNA
.2		BN69-17449C	PAD PACKING;LED,PAPER,T3,W50X50,L2000,YE	0	SNA
.2		BN69-20259A	CUSHION-SET FRONT;65UTU7000J,EPS,16.7g/l	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN69-20260A	CUSHION-SET SIDE;65UTU7000J,EPS,16.7g/l,	2	SNA
..3		0103-005099	RESIN EPS;BASF303/NP,Natural,Natural,HB	372	SNA
.2		BN69-20972A	PALLET-WOODEN;QE65Q70,WOOD,W1120,L1620,H	0	SNA
.2		BN96-51036A	ASSY PACKING P-CUSHION SET;UE65TU7000,EP	1	SNA
..3		BN69-20258A	CUSHION-SET;65UTU7000J,EPS,16.7g/l,WHITE	1	SNA
..3		BN69-20587A	BOX UNIT-IN;65UTU8000H,CB,DW1,C1,L1920,W	1	SNA
1		BN92-27088D	ASSY LABEL POP;UTU7000K	1	SNA
.2		BN68-10551D	LABEL POP-HIGHLIGHT;LS01T,PET,T0.1,W70,L	1	SNA
1		BN92-27162G	ASSY LABEL;UTU7000K	1	SNA
.2		BN68-06708G	LABEL-RATING;Monitor,WW,PP,T0.161,W93,L7	1	SNA
.2		BN68-09990A	LABEL-ENERGY;EU,PP,T0.13,W60,L176	1	SNA
.2		BN68-10112C	LEAFLET-QUICK SETUP GUIDE;UTU7000K,ZG & ZU	1	SNA
1		BN92-27179V	ASSY BOX;UTU7000K	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,W60,L110,WHT,NO SILK,9	1	SNA
.2		BN68-05640A	LABEL BOX;ALL,ART,W110,L130,EUROPE,LED T	1	SNA
.2		BN69-20948F	BOX UNIT-OUT;65UTU7000K,CB,DW4,F3,L1591,	1	SNA
1	ACCE1	BN92-27182C	ASSY ACCESSORY;UTU7000K	1	SNA
.2		BN96-51208A	ASSY ACCESSORY MANUAL CABLE;TU7,HUNGARY	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-001118	POWER CORD-DT;EUR,2P-F,250V,2.5A,BLK,L15	1	SA
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001962	BAG PE;LDPE,BIOBASED,T0.05,W400,L300,TRP	1	SNA
..3		BN59-01315B	REMOCON-TV;2019 TV,SAMSUNG,44KEY,3.0V,EU	1	SA
..3		BN68-02989A	LABEL ETC;ALL MODEL,ALL,ART,W65,L30,65X3	1	SNA
..3		BN68-03548J	LEAFLET-WARRANTY;comm,Samsung,17Lang,Mid	1	SNA
..3		BN68-07598A	LEAFLET-REGULATORY GUIDE;QT/UT/LFD/LM/HD	1	SNA
..3		BN68-09371A	LEAFLET-REGULATORY GUIDE;QT/UT,W/W,MOJO,	1	SNA
..3		BN68-10314K	MANUAL USERS;TU7000,XH,MOJO,1COLOR,EURO	1	SNA
..3		BN68-10395A	LEAFLET-ACCESSORY KIT;TU7000,ZG & ZU & XC & XN	1	SNA
1		BN95-06582A	PRODUCT LCD DP;DP,BN95-06386A,CY-GT065HG	1	SA
.2		BN92-27126A	ASSY P/MATERIAL;CY-GT065HGHV1H,inhouse	1	SNA
..3		BN69-19557A	PALLET-WOODEN;65" inhouse LCM,EUR type,W	0	SNA
..3		BN69-20574B	CUSHION-PANEL;65TU7K,EPS,40g/l,WHITE,ESD	0	SNA
...4		0103-005099	RESIN EPS;BASF303/NP,Natural,Natural,HB	990	SNA
.2	PANEL	BN95-06386A	PRODUCT LCD-SDC;CY-GT065HGLV1V/H,TU7000,	1	SA
..3	M0131	BN63-00520A	GASKET-EMI;APPOLO_PAL,FABRIC,T0.13,W10,L	2	SNA
..3		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
..3		BN74-00053E	TAPE-SINGLE FACE;PAPER,3M2307,T0.14,W20,	0	SNA
..3		BN90-11350C	ASSY BACK LIGHT UNIT;65UTU7000K	1	SNA
...4		BN61-16882A	DIFFUSER PLATE;20Y_TU7000_65INCH_DP,PS,T	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN61-17101A	OPTICAL SHEET-COMPLEX;20Y_65INCH_TU7000_	1	SNA
...4		BN96-50452C	ASSY CHASSIS REAR P;65UTU7000K,EGI-SECC,	1	SNA
....5		0203-007064	TAPE-DOUBLE FACE;ACRYL,T0.2,W6,N/A,WHITE	0	SNA
....5		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	0	SNA
....5		BN02-00352B	TAPE-SINGLE FACE;PET,T0.05,W30,L50M,BLAC	0	SNA
....5		BN02-00586A	TAPE DOUBLE FACE;UNU7100X,ACRYL,T0.3,W3,	4	SNA
....5		BN39-02547A	LEAD CONNECTOR-BLU;65TU8000,UL21016,12P,	1	SNA
....5	CB20	BN61-11982B	BRACKET-WALL;65MU8000,CR-SPCC,NATURAL,M8	4	SNA
....5		BN61-13557K	BRACKET-WIRE;55KS7000,SW-C,T1,SILVER,ZIN	2	SNA
....5		BN61-13557P	BRACKET-WIRE;75QNQ8CB,SW-C,T1,SILVER,L66	7	SNA
....5		BN61-13557Q	BRACKET-WIRE;55KS7000,SW-C,T1,SILVER,L62	2	SNA
....5		BN61-16648B	HOLDER-SOURCE PCB;65UTU7000K,PC,T1,BLACK	8	SNA
....5		BN61-16689B	FRAME-MIDDLE LEFT RIGHT;65UTU7000K,PC+GF	2	SNA
....6		0103-011580	RESIN PC;LS-3104G/G62373,Gray,GY0287,V-2	78	SNA
....5		BN61-16805A	STUD-PEM;65UTU7000K,SUM24L,L11.7,WhiteSi	8	SNA
....5		BN61-16883A	OPTICAL SHEET-REFLECTOR;20Y_TU7000_65INC	1	SNA
....5		BN61-16985A	SUPPORT-PLATE;65TU8000,PC,V-2,CLEAR	12	SNA
....6		0103-005036	RESIN PC;SC-1220R/ENP,Transparent,TP0003	115	SNA
....5		BN63-18832A	INSULATOR-SMPS;65TU7000,PC,BLACK,L207,W2	1	SNA
....5	CC04	BN64-04253A	CHASSIS-REAR;65UTU7000K,EGI-SECC,-,T0.8,	1	SNA
....5		BN96-50313A	ASSY LED BAR P;20Y 65TU8000,ALUMINUM,Lef	5	SNA
....5		BN96-50314A	ASSY LED BAR P;20Y 65TU8000,ALUMINUM,Rig	5	SNA
....5		BN96-51566B	ASSY FRAME P-MIDDLE BOTTOM;65UTU7000K,PC	1	SNA
....6		BN60-01661A	SPACER-FABRIC;CONDUCTIVE FABRIC,L20,GRAY	2	SNA
....6		BN61-16688B	FRAME-MIDDLE BOTTOM;65UTU7000K,PC+GF10%,	1	SNA
....5		BN96-51567B	ASSY FRAME P-MIDDLE TOP;65UTU7000K,PC+GF	1	SNA
....6		BN02-00586C	TAPE DOUBLE FACE;TU7000,ACRYL,T0.3,W3,L1	3	SNA
....6		BN61-16687B	FRAME-MIDDLE TOP;65UTU7000K,PC+GF10%,V-2	1	SNA
.....7		0103-011580	RESIN PC;LS-3104G/G62373,Gray,GY0287,V-2	145	SNA
..3		BN96-50256A	ASSY OPEN CELL;SDC,65Inch,Y20 New,LSF650	1	SNA
...4		BN81-15714A	A/S OPEN CELL-ADHESIVE-A.C.F;LSM490YP01-	1	SNA
...4		BN81-17380A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,0201-0	1	SNA
...4		BN81-18787A	A/S-POLARIZER C/F;POLARIZER C/F,LJ01-122	1	SNA
...4		BN81-18845A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,LJ	1	SNA
...4		BN81-18846A	A/S-POLARIZER TFT;POLARIZER TFT,LJ01-115	1	SNA
...4		BN81-18847A	A/S-ASSY PCB-SOURCE(F-L);ASSY PCB-SOURCE	1	SNA
...4		BN81-18848A	A/S-ASSY PCB-SOURCE(F-R);ASSY PCB-SOURCE	1	SNA
...4		BN81-18849A	A/S-ASSY PCB-SOURCE(B-L);ASSY PCB-SOURCE	1	SNA
...4		BN81-18850A	A/S-ASSY PCB-SOURCE(B-R);ASSY PCB-SOURCE	1	SNA
..3		BN96-50450A	ASSY CHASSIS FRONT P;65UTU7000K,Al,Carbo	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	SCREW	6001-003080	SCREW-MACHINE;CH,+,M3,L4,ZPC(BLK),SWRCH1	2	SA
...4		BN02-00074E	TAPE SINGLE FACE;U7201,PET,T0.05,W10,L20	4	SNA
...4		BN60-01655A	SPACER-CONDUCTIVE;CONDUCTIVE FABRIC/PU F	1	SNA
...4		BN60-01661A	SPACER-FABRIC;CONDUCTIVE FABRIC,L20,GRAY	2	SNA
...4		BN61-16510A	BRACKET-CORNER TOP;TU7000,SK5,T1.5,NATUR	4	SNA
...4		BN63-17418A	SHEET-PROTECTION COVER;Q7F,PO,T0.05,W6,L	0	SNA
...4		BN63-17418F	SHEET-PROTECTION COVER;Q7F,PO,T0.05,W25,	3	SNA
...4		BN63-17418K	SHEET-PROTECTION COVER;LS003,PO,T0.05,W1	1	SNA
...4	FD01	BN63-18469A	COVER-DECORATION;65UTU7000K,PC+ABS+MD18%	1	SNA
...4	AC155	BN64-04254A	CHASSIS-FRONT;65UTU7000K,Al,Carbon Silve	1	SNA
.2		BN98-04426A	ASSY K/D-PACKING;inhouse used models 201	1	SNA
..3		0204-008185	SILICAGEL;Calcium chloride,Cacl2,94%,20g	0	SNA