


1. Exploded View & Part List

Exploded View

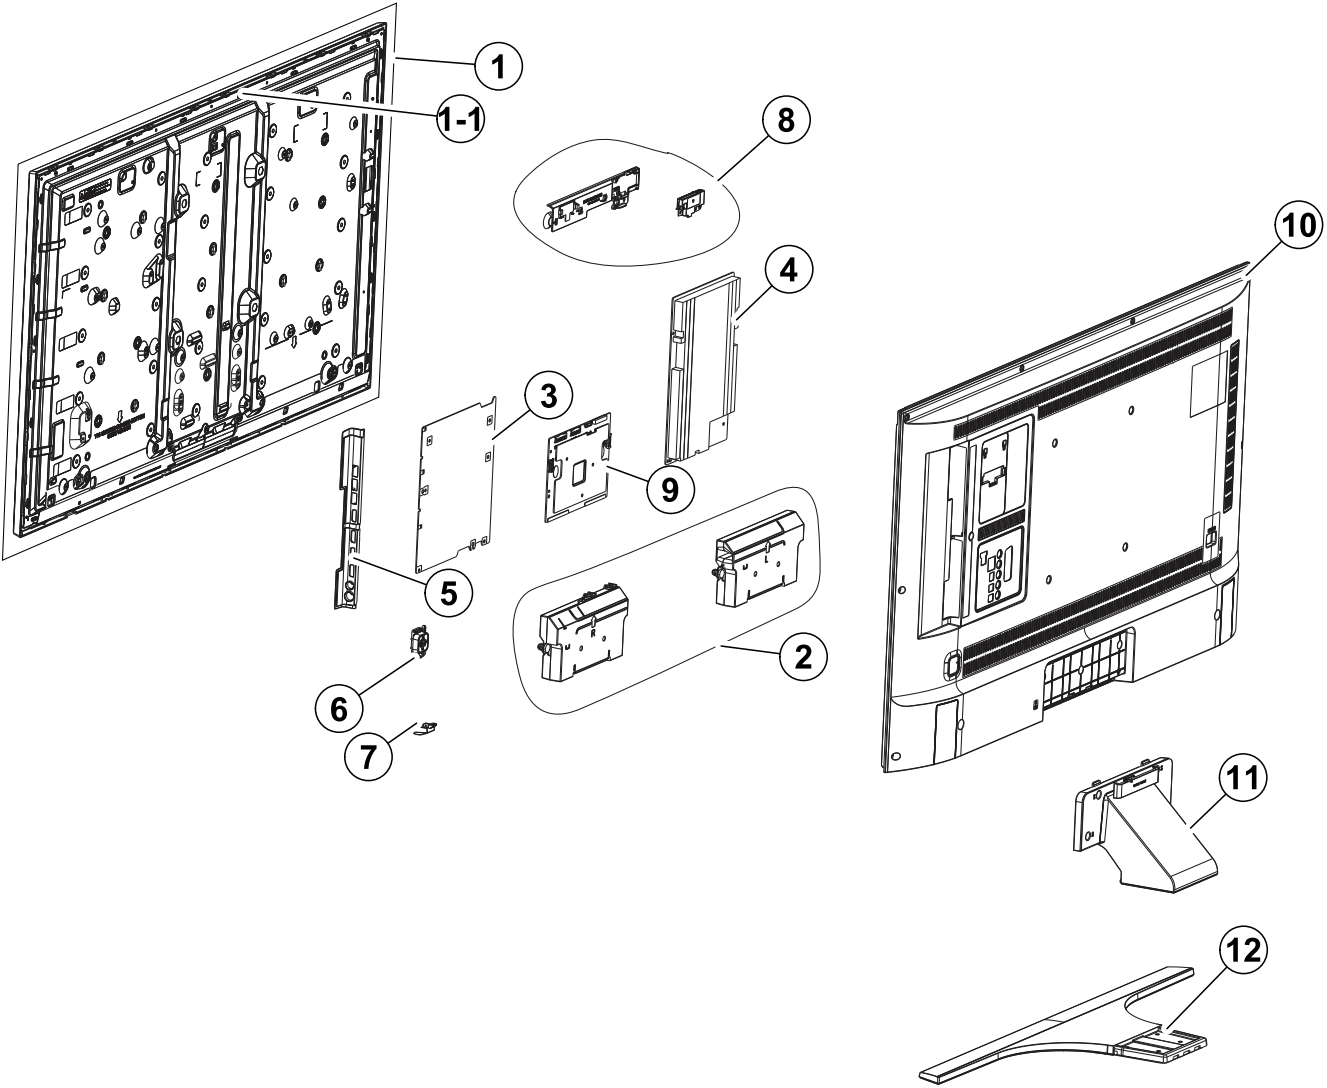

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2		BN95-01996A	PRODUCT LCD-CSOT; CY-GJ055HGHV1V,JU6400,B	SA	1
1-1	3	TC01A	BN96-35596A	ASSY CHASSIS TOP P; Y15_JU6.4K_55,PC+ABS	SA	1
2	2	SP01A	BN96-35006E	ASSY SPEAKER P; 6ohm,4pin,10W,JU6400 55"	SA	1
3	2	M0014	BN94-09019M	ASSY PCB MAIN; UHD 6K	SA	1
4	2	P001A	BN44-00807A	DC VSS-LED TV PD BD; L55S6_FHS,L55S6_FHS,	SA	1
5	3		BN61-11587A	HOLDER-SIDE AV; JU6400,HIPS,BLK,HB, 1 TUN	SNA	1
6	2		BN96-35345B	ASSY BOARD P-FUNCTION_SW; JU7500,Function	SA	1
7	2	FB01A	BN96-35346D	ASSY BOARD P-FUNCTION ASSY; JU6400,Function	SA	1
8	2	NW01	BN59-01194F	NETWORK; 11ac Combo,Internal WiFi,USB 2.0	SA	1
9	3	TCON	BN96-35353A	ASSY T CON P; ST5461D02-2-C-5,CSOT 55" 6	SA	1
10	2	R001A	BN96-37240F	ASSY COVER P-REAR; JU6400 55,EUROPE,PC+AB	SA	1
11	2	SG01A	BN96-35974B	ASSY GUIDE P-STAND; JU6400,40"~55",JU6440	SA	1
12	2	SB04A	BN96-35979D	ASSY STAND P-BASE; JU6470/JU6470/JU6400,5	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE55JU6400KXXC (TH01)		
1		BN90-06530C	ASSY W/I;LED_J6000	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF**,UH**,UG**,ELEC	1	SNA
.2		BN81-09501Y	A/S PART SET-MECH W/I;UJ6P,U55JP*	1	SNA
1	S001A	BN90-06546F	ASSY STAND;LED_J6K,UHD	1	SNA
.2	SG01A	BN96-35974B	ASSY GUIDE P-STAND;JU6400,40"~55",JU6440	1	SA
..3	SCREW	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	1	SA
..3		6902-002523	BAG PE;HDPE/PE FOAM,T0.5*,W250,L400,WHT,	1	SNA
..3	SG01	BN61-11878A	GUIDE-STAND NECK;JU6400_55,PC+GF20%,BLK	1	SNA
...4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V2	1.5mm	530
..3	AH089	BN61-11933A	HOLDER-CABLE;JU6300, 6400,ABS,BLK,HB	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,1.5mm H	10	SNA
..3	CCM1	BN63-05199P	SHEET-COVER;AMBER,PE,T0.08,W1000,200M,CL	0	SNA
..3		BN63-13705B	COVER-NECK;JU6400 40"/48"/55',ABS+PC,EO	1	SNA
..3		BN63-13706A	COVER-NECK SUB;JU6400_55,ABS,BK	1	SNA
.2	SB04A	BN96-35979D	ASSY STAND P-BASE;JU6470/JU6470/JU6400,5	1	SA
..3		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
..3	SCREW	6003-001010	SCREW-TAPTYPE;FH,+,B,M3,L6,ZPC(WHT),SWRC	6	SA
..3		6902-002435	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W800,L15	1	SNA
..3		6902-002522	BAG PE;HDPE/PE FOAM,T0.5*,W200,L400,WHT,	1	SNA
..3		BN60-00184B	SPACER-FOAM;FOAM,30000mm,DARK GRAY,1T,35	1	SNA
..3	CCM1	BN63-02183D	SHEET-COVER;Rhcm,PE,T0.04,680mm,200M,HB,	0	SNA
..3		BN63-12632C	FILM HOT STAMPING;JU6.4K,PET,25um,W45,Si	1	SNA
..3		BN63-13301G	COVER-STAND BASE;JU6400_55",ABS+PC,BLK,S	1	SNA
...4		0103-010376	RESIN PC ABS;FR3012 / 901510,BLACK,BK000	270	SNA
..3		BN64-02823A	BADGE-INLET;HU7200,Ni,0.08,20,black chro	1	SNA
..3		BN67-00327M	RUBBER-FOOT;STAND,SILICON,10*10,T1.5,GRA	7	SNA
..3	CB06A	BN96-35984A	ASSY BRACKET P;JU6300_48/50/55,BN61-1150	1	SNA
...4	SCREW	6003-000115	SCREW-TAPTYPE;BH,+,B,M3,L6,ZPC(BLK),SWRC	3	SA
...4		BN61-11501A	BRACKET-STAND BASE;JU6400_55,HGI,T2.0	1	SNA
...4	CB18	BN61-11713A	BRACKET-STAND LINK;JU6400_55,HGI,T2.0	1	SNA
1	R001A	BN90-07094D	ASSY COVER REAR;LED_UHD 6K,55	1	SNA
.2	SCREW	6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	17	SA
.2	SCREW	6003-000003	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(BLK),S	1	SA
.2	R001A	BN96-37240F	ASSY COVER P-REAR;JU6400 55,EUROPE,PC+AB	1	SA
..3	R001	BN63-13232N	COVER-REAR;JU6400 55",PC+ABS+GF15%,V1	1	SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	3200	SNA
..3		BN68-03518H	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,120	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN68-06900B	LABEL-TERMINAL SIDE;JU6400,PET,T0.125,15	1	SNA
1		BN91-13786A	ASSY LCM-CSOT;BN95-01996A,CY-GJ055HGHV1V	1	SNA
.2		BN95-01996A	PRODUCT LCD-CSOT;CY-GJ055HGHV1V,JU6400,B	1	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	10	SA
...3	SCREW	6001-003079	SCREW-MACHINE;CH,+,M3,L6,ZPC(BLK),SWRCH1	4	SA
...3		BN02-00114A	TAPE ETC-COF;NNB 55",PET,0.07T,20,12,GRE	16	SNA
...3		BN02-00152E	TAPE ETC-SHEET FIXING;Y13 SF-LED,PET,0.0	3	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN90-06339A	ASSY MISC-BLU;CY-GJ055HGHV1V	1	SNA
...4		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
...4		BN61-11508A	SUPPORT-PLATE;Y15 LED,PC,V2,CLEAR,OD-19m	17	SNA
....5		0103-005036	RESIN PC;M2407,550115,TP0003	34	SNA
....5		0103-009493	RESIN PC;LH-1070W,W92853,WT0107,V-0	51	SNA
...4		BN61-11751A	LGP-DIFFUSER PLATE;55inch Flat, Diffuse	1	SNA
...4		BN63-13505A	SHEET-DBEF;DLF250,PET,0.25,1219.6,691.5,	1	SNA
...4		BN63-13506A	SHEET-PRISM;PTM358ZT / G200,PET,0.295,12	1	SNA
...4		BN63-13508A	SHEET-REFLECTOR;UXS8P-175,PET,0.175,1201	1	SNA
...4		BN96-34803A	ASSY LED BAR P-LED BAR;55" UHD_L_CSOT,8e	6	SNA
...4		BN96-34804A	ASSY LED BAR P-LED BAR;55" UHD_R_CSOT,6e	6	SNA
...4		BN96-35400B	ASSY CHASSIS BOTTOM P;JU6400 55" CSOT,BN	1	SNA
....5		0203-006897	TAPE-DOUBLE FACE;SI,T1.0,W10,L50,WHT	1	SNA
....5	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	1	SA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	6	SNA
....5		BN02-00173C	TAPE OPP;PET,0.05,40,BLK	0	SNA
....5		BN02-00352E	TAPE OPP;PET,T0.05,W15,L50M,BLK,ULNO.E16	0	SNA
....5		BN61-11401A	HOLDER-MIDDLE U;Y15 JU7K 55",PC+GF10%,WT	1	SNA
....5		BN61-11402A	HOLDER-MIDDLE D;Y15 JU7K 55",PC+GF10%,WT	1	SNA
....5		BN61-11403A	HOLDER-MIDDLE LR;Y15 JU7K 55",PC+GF10%,W	2	SNA
....6		0103-010237	RESIN PC;LS-3104G/LG30273VG,White,WT0044	90	SNA
....5		BN61-11477A	HOLDER-SOURCE PCB;Y15 JU7K SDC,ABS,BLK,H	4	SNA
....6		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,1.5mm H	8	SNA
....5		BN62-00690B	INSULATION-PD-BOARD;JU7500,PC,0.45,255.0	1	SNA
....5	CC02	BN64-02864A	CHASSIS-BOTTOM;Y15 JU7K 55",EGI-SECC AG,	1	SNA
....6		BN01-00248A	STEEL;EGI-SECC AG,1290,0.6mm,763mm,SECC,	1	SNA
....6		BN61-11982A	HOLDER-WALL RIVET;Y15 F-LED,CR-SPCC,L15.	4	SNA
....5		BN96-34710A	ASSY BOARD P-LED INTERFACE BOARD;8pin 55	1	SNA
....5		BP63-00024A	GASKET-RECT,H/S;SVP-50L2H,Conductive Fab	2	SNA
....5		GK63-00070A	GASKET;ID-45BNKH-10-8-5-23-C,Conductive	2	SNA
...4		BN96-36073A	ASSY FRAME P-MOLD MIDDLE (U);JU6400 55",	1	SNA
....5		BN61-11398A	FRAME-MOLD MIDDLE U;Y15 JU7K 55",PC+GF10	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN96-36074A	ASSY FRAME P-MOLD MIDDLE (D);JU6400 55",	1	SNA
....5		BN60-00735S	SPACER-MIDDLE;Y14 VNB 65,PET,L485,NTR,T0	1	SNA
....5		BN60-00744A	SPACER-RUBBER;Y13 F-LED SLIM,SH-0140U+AT	1	SNA
....5		BN60-01023F	SPACER-MIDDLE D;Y15 JU7K 55",PET,L685,NT	1	SNA
....5		BN60-01120E	SPACER-PANEL(UD);Y15 UHD Flat 55" AUO,SI	2	SNA
....5		BN61-11399B	FRAME-MOLD MIDDLE D;Y15 JU6.4K 55",PC+GF	1	SNA
...4		BN96-36458A	ASSY FRAME P-MOLD MIDDLE LR;Y15 FLAT, 55	2	SNA
....5		BN60-01023E	SPACER-MIDDLE LR;Y15 JU7K 55",PET,L670,N	2	SNA
....5		BN60-01228A	SPACER-PANEL;JU6400_55_CSOT,SI,L682,GRAY	2	SNA
....5		BN61-11400A	FRAME-MOLD MIDDLE LR;Y15 JU7K 55",PC+GF1	2	SNA
....6		0103-007368	RESIN PC;LS-3104G,K2495,BK0048,3.0mm V-2	40	SNA
..3		BN96-34580A	ASSY OPEN CELL;ST5461D02-1,3840 x 2160,5	1	SNA
...4		BN81-11249A	A/S-IC DRIVER SOURCE;CSOT 55inch UD 60hz	12	SNA
...4		BN81-11250A	A/S-IC DRIVER GATE;CSOT 55inch UD 60hz,3	16	SNA
...4		BN81-11251A	A/S-ASSY PCB-SOURCE LEFT;CSOT 55inch UD	1	SNA
...4		BN81-11252A	A/S-ASSY PCB-SOURCE RIGHT;CSOT 55inch UD	2	SNA
...4		BN81-11253A	A/S-POLARIZER-C/F;CSOT 55inch UD 60hz,31	1	SNA
...4		BN81-11254A	A/S-POLARIZER-TFT;CSOT 55inch UD 60hz,31	1	SNA
..3	FL06	BN96-34970A	ASSY CABLE P-FFC;UHD,FFC,NH,57mm 1.0,96	2	SNA
..3		BN96-35018A	ASSY COVER P-SOURCE PCB;Y15 FLAT, 55,BN6	1	SNA
...4		BN62-00537L	INSULATION-S-COVER-R;Y15 JU7K 55" SDC,PE	1	SNA
...4		BN62-00537M	INSULATION-S-COVER-L;Y15 JU7K 55" SDC,PE	1	SNA
...4		BN63-13204A	COVER-SOURCE PCB;Y15 JU7K 55",EGI-SECC A	1	SNA
..3	TCON	BN96-35353A	ASSY T CON P;ST5461D02-2-C-5,CSOT 55" 6	1	SA
..3	TC01A	BN96-35596A	ASSY CHASSIS TOP P;Y15_JU6.4K_55,PC+ABS	1	SA
...4		BN02-00381G	TAPE CONDUCTIVE-PTC(UD);Y15 UHD Flat 55"	2	SNA
...4		BN02-00381H	TAPE CONDUCTIVE-PTC(LR);Y15 UHD Flat 55"	2	SNA
...4		BN60-00715A	SPACER-TOP,CORNER;Y13 Slim F-LED,GASKET*	2	SNA
...4		BN60-01115A	SPACER-TOP LINK;Y15 JU7K,CONDUCTIVE FABR	3	SNA
...4		BN60-01254D	SPACER-TOP (D);JU6.4K 55",PUR FOAM,L1170	1	SNA
...4		BN63-10886E	SHEET-COVER;U28D590,PET+SI,0.052,W30mm,1	3	SNA
...4		BN63-11875Q	SHEET-COVER;Y14 SF-LED,POLY*,0.068,W37,R	1	SNA
...4	AC157	BN64-02896A	CHASSIS-TOP;JU6400_55,PC+ABS+MF15%,BK000	1	SNA
....5		0103-010326	RESIN PC ABS;HRM1530F/BK00749,Black,BK00	350	SNA
...4		BN96-36211A	ASSY COVER P-DECORATION;JU6400 55,Chrome	1	SNA
....5		BN63-10886D	SHEET-COVER;U28D590,PET+SI,0.052,W35mm,1	1	SNA
....5	FD01	BN63-13307A	COVER-DECORATION;JU6400_55,PC+ABS+MF17%,	1	SNA
....6	AS080	BN63-07229A	SHEET-COVER;rose70",SI,T0.052,W50mm,100M	1	SNA
....6		BN63-10877A	FILM HOT STAMPING;UF6500, UF6600, UF6700	1	SNA
1	M0017	BN91-14193X	ASSY CHASSIS;UE55JU6400KXXC	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	M0014	BN94-09019M	ASSY PCB MAIN;UHD 6K	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		BN61-11587A	HOLDER-SIDE AV;JU6400,HIPS,BLK,HB, 1 TUN	1	SNA
...3	AH020	BN62-00726A	HEAT SINK;Y15 UHD 6K (Main),A1050,BLACK	1	SNA
...3		BN97-09483A	ASSY DRM-KEY;JU7000,7500,HDCP, MAC, CI+	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFI;MIRACAST(HDCP2.2), TV	1	SNA
...4		BN46-00115P	KEY CODE;CI+, TV, HAWK, EU	1	SNA
...3		BN97-10060D	ASSY SMD;UHD 6K,BN41	1	SNA
...4		0202-001830	SOLDER-CREAM;LFM-48W TM-HP,D20~38um,96.5	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	2	SA
...4		0406-001573	DIODE-TVS;AOZ8806DI-05,6	1	SA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	6	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	3	SC
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7Koh	1	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,-30V,-11.	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	2	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	4	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	1	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1001-001934	IC-VIDEO SWITCH;SiI9777,LQFP,208P,28X28m	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	4	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	2	SA
...4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
...4		1201-003891	IC-AUDIO AMP;NTP7415,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006330	IC-POWER SUPERVISOR;TPS2065DBV,SOT-23,5P	2	SA
...4		1203-007018	IC-DC/DC CONVERTER;TPS54821RHL,QFN,14P,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007694	IC-DC/DC CONVERTER;SN1106041DDAR,DDA,8Z3	1	SA
...4		1203-008023	IC-POS.LADJUST REG.;AOZ2003PI,SO-8,8P,4.	1	SA
...4		1203-008082	IC-DC/DC CONVERTER;TPS54627DDAR,SOP 8P,8	1	SA
...4		1203-008104	IC-POS.FIXED REG.;S-13A1D18-E800,HSOP,8	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008112	IC-POSILADJUST REG.;AOZ2002PI,SO-8,8P,4.	1	SA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA
...4		1203-008393	IC-DDR TERMINATION REG.;AP2303MTR-G1-89,	1	SA
...4		1203-008454	IC-DC/DC CONVERTER;TPS56528,HSOP8,8P,4,8	1	SA
...4		1204-003587	IC-DECODER;SDP1406,PBGA,1053P,31x31mm,PL	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	1	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	3	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	12	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	43	SNA
...4		2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000166	R-CHIP;300Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	65	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	12	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	52	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	4	SA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	16	SNA
...4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	16	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	15	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	10	SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	18	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	32	SNA
...4		2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	16	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007314	R-CHIP;5.6Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	26	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	9	SNA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	26	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	6	SA
...4		2007-007861	R-CHIP;62Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	2	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	11	SA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008213	R-CHIP;4.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA
...4		2007-009117	R-CHIP;49.9Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	3	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	5	SA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	19	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	5	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000854	C-CER,CHIP;0.039nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	10	SNA
...4	AD480	2203-003019	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1005	3	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	338	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006257	C-CER,CHIP;470nF,10%,6.3V,X5R,TP,1005,0.	2	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	8	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	52	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	7	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	13	SA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	4	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	37	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	16	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	106	SNA
...4	AD480	2203-007486	C-CER,CHIP;1000nF,10%,50V,X5R,TP,1608	2	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	21	SA
...4		2409-001338	C-POLYMER ,CHIP;47uF,20%,6.3V,TP,3.2x1.6	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4Ohm,50mA,45,	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	1	SA
...4		2703-003135	INDUCTOR-SMD;4.7uH,20%,6965,0.04Ohm,7000	1	SNA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	4	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,4mm,0.072Ohm	4	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,4.5,0.024ohm	1	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,4.5,0.03ohm,	1	SA
...4		2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	SA
...4		2801-004477	CRYSTAL-SMD;24.576MHz,20ppm,SMD,18pF,20o	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	6	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	53	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3701-001861	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	4	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008422	HEADER-BOARD TO CABLE;BOX,9P,1R,1.25mm,S	1	SA
...4	EH01	3711-008659	HEADER-BOARD TO CABLE;BOX,16P,2R,2mm,ANG	1	SA
...4	EH01	3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2.0mm,A	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	2	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003667	JACK-PHONE;1P/7C,SN/NI,BLK,STRAIGHT,3.6P	1	SA
...4	JACK	3722-003837	JACK-USB;9P/1C,AU/SN/NI,BLU,SMD-A,A,3.0,	1	SA
...4		6302-001376	GASKET;D-Q43-14-180,6mm,SI	8	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	ET01	BN40-00316B	TUNER;GT2CX-5C11,GT2CX-5C11,DVB-T2 Singl	1	SA
...4		BN41-02344B	PCB MAIN;JU6400_BOSTON,Hawk-MU,FR-4,4,B,	1	SNA
...4		BN97-09408A	ASSY MICOM-MAIN;T-HKMDEUC-XXXX,UWJ51,H26	1	SNA
....5		1107-002357	IC-EMMC;H26M41103HPR,8Gbyte,BGA,153P,11.	1	SA
...4		BN97-09411A	ASSY MICOM-SPI;T-HAWDEUS3-XXXX,UWJ51,W25	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-09412A	ASSY MICOM-SPI;X-XXXXXXXXXX-XXXX,UWJ51,W2	1	SNA
....5		1107-002223	IC-NOR FLASH;W25Q16DVSSIG,16Mbit,2Mbitx8	1	SNA
...3	M0131	MD63-00103A	GASKET;GRANDSLAM,Conductive Fabric,1,10,	3	SNA
1		BN91-14215C	ASSY SHIELD;LED_J6K,UJP6 FLAT	1	SNA
.2	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3.0,L5.0,ZPC(WHT),S	9	SA
.2		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
.2	M-F	BN39-01990L	LEAD CONNECTOR-FUNCTION;48JU6700,LEAD CO	1	SA
.2	EC13	BN39-02017C	LEAD CONNECTOR;FLAT CONNECTOR ASS'Y,Lead	1	SA
.2		BN39-02025D	LEAD CONNECTOR-POWER;UN55JU6700AFXZA,Fla	1	SA
.2		BN39-02030C	LEAD CONNECTOR-BLU;BLU,LEAD CONNECTOR,UL	1	SA
.2	P001A	BN44-00807A	DC VSS-LED TV PD BD;L55S6_FHS,L55S6_FHS,	1	SA
.2	NW01	BN59-01194F	NETWORK;11ac Combo,Internal WiFi,USB 2.0	1	SA
.2	SP01A	BN96-35006E	ASSY SPEAKER P;6ohm,4pin,10W,JU6400 55"	1	SA
.2		BN96-35345B	ASSY BOARD P-FUNCTION_SW;JU7500,Function	1	SA
.2	FB01A	BN96-35346D	ASSY BOARD P-FUNCTION ASSY;JU6400,Functi	1	SA
.2	FL06	BN96-36273B	ASSY CABLE P;UN55JU7000,FFC,NH,350mm,51P	1	SA
1		BN92-17087A	ASSY LABEL;LED_J6K	1	SNA
.2		BN68-06708E	LABEL RATING;ALL,WW,PP,T0.05,93,73,Dark	1	SNA
.2		BN68-07137C	LEAFLET-01,QSG;JU6400,EUROPE,ART,B4-> B5	1	SNA
1		BN92-17112E	ASSY BOX;LED_J6K	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-11677F	BOX-SET;55JU6400-TS,CB,A-01,DW3,W1402,D1	1	SNA
1		BN92-17138A	ASSY P/MATERIAL;LED_J6K,55 6500	1	SNA
.2		6902-002504	BAG ROLL;HDPE/PE FOAM,T0.5*,W900,L300M,T	3	SNA
.2		6922-000013	BAND;PP,W18,L2300/L2900,TRP	1	SNA
.2		BN01-00043A	FOIL-STRETCH-HOOD;LLDPE,T0.08,W980,L1400	0	SNA
.2	AS080	BN63-07229C	SHEET-COVER;rose 70",SI,T0.052,W70mm,100M	1	SNA
.2		BN63-12490A	COVER-SHEET NITRON;UE50H6200,PE,T4.0,W11	1	SNA
.2		BN69-08445A	PAD;COMM,CB,SW2,T3,W900,L1200,-,-,-,YE	1	SNA
.2		BN69-11281A	CUSHION-SET;55JU6400-TS,EPS,16.7g/l,W/W	1	SNA
.2		BN69-11293A	CUSHION-FRONT;55JU6400,EPS,16.7g/l	1	SNA
...3		0103-005099	RESIN EPS;BASF303,Natural,Natural	124	SNA
.2		BN69-12116A	PALLET-WOODEN;55UJ6400,WOOD,930,1420,130	1	SNA
.2		BN74-00008N	TAPE OPP;Silent,T0.065,W60,L1500M,NTR,Ac	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	ACCE1	BN92-18411L	ASSY ACCESSORY;UHD 6K	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,PP,T0.135,60,125	1	SNA
.2		BN96-35696A	ASSY ACCESSORY CABLE;LED TV , UJ6P, UHD	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000982	CBF-POWER CORD;DT,EU/Rus/Cambodia,LP-21L	1	SA
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
..3		BN59-01198Q	REMOCON-REMOCON;TM1250A,49,3.0V,TM1250A_	1	SA
..3		BN96-35528A	ASSY ACCESSORY-SCREW;JU7500,40	1	SNA
...4		6902-002474	BAG SCREW;LDPE,T0.05*,W70,L90,TRP,RECYCL	1	SNA
...4	HOLDE	BN96-09494D	HOLDER-BOLT;BH+,SWRCH18A,L14,M4,B TYPE	8	SA
.2		BN96-35716U	ASSY ACCESSORY MANUAL;LED TV , UJ6P, UHD	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3		BN68-00514K	MANUAL FLYER-07,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-02989A	LABEL-PQS;ALL,ALL,Paper,30,65,WHITE,SEH	1	SNA
..3		BN68-04972E	LEAFLET-04,REGULATORY GUIDE;ALL,SAMSUNG,	1	SNA
..3		BN68-07198A	MANUAL USERS-01;JU6400,XC,W/P	1	SNA
..3		BN68-07351C	LEAFLET-05,FICHE_15TV(6SERIES);ALL,W/P*	1	SNA
1		BN92-18602G	ASSY LABEL POP;UHD 6K	1	SNA
.2		BN68-07195A	LABEL POP-01,HIGHLIGHT STICKER;U6500, U6	1	SNA